




FTSN

Full Supported Round Rail

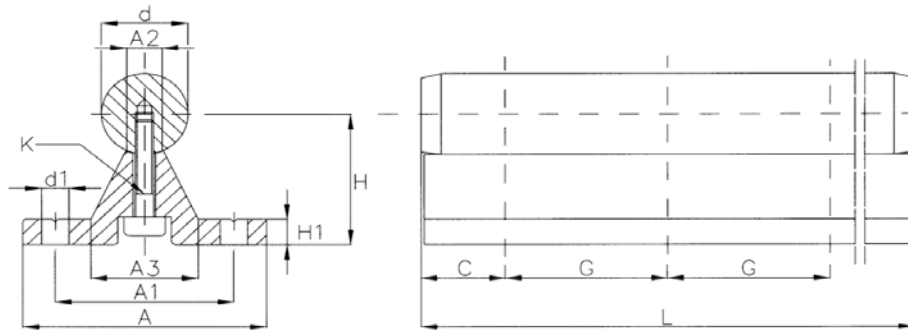

Part No.	d	A	H +/-0.2	A1	A2	A3	H1	d1	K	C	G	Weight	
												FTSN-G Support rail g/M	FTSN-G W Rail + Support g/M
FTSN 12G	12	40	22	29	5.4	15	5	4.5	M4x20	37.5	75	520	1.600
FTSN 12G2*	12	40	22	29	5.4	15	5	4.5	M4x20	60	120	520	1.600
FTSN 16G	16	45	26	33	7.0	19	5	5.5	M5x20	50	100	640	2.500
FTSN 16G2*	16	45	26	33	7.0	19	5	5.5	M5x20	75	150	640	2.500
FTSN 20G	20	52	32	37	8.1	23	6	6.6	M6x25	50	100	900	3.800
FTSN 20G2*	20	52	32	37	8.1	23	6	6.6	M6x25	75	150	900	3.800
FTSN 25G	25	57	36	42	10.3	26	6	6.6	M8x30	60	120	1.080	5.900
FTSN 25G2*	25	57	36	42	10.3	26	6	6.6	M8x30	100	200	1.080	5.900
FTSN 30G	30	69	42	51	11.0	29	7	9.0	M10x30	75	150	1.430	7.500
FTSN 30G2*	30	69	42	51	11.0	29	7	9.0	M10x30	100	200	1.430	7.500
FTSN 40G	40	73	50	55	15.0	36	8	9.0	M10x40	100	200	1.810	12.400
FTSN 40G2*	40	73	50	55	15.0	36	8	9.0	M10x40	150	300	1.810	12.400
FTSN 50G	50	84	60	63	19.0	40	9	11.0	M12x45	100	200	2.450	18.900
FTSN 50G2*	50	84	60	63	19.0	40	9	11.0	M12x45	150	300	2.450	18.900

Hole Spacings Machined to DIN 912 - 8.8
 *FTSN.G2 non Stock (2 week lead-time)

Order Code

FTSN 20 G - W 2000 - 20

1st Hole
 Overall length
 Round Rail Material (W / WV / WRA)
 Hole spacing
 Rail Diameter
 Type of support

Information:

This rail is designed for use with our Open Linear Linear Bearings **LM__UUOP** or Pillow Block Housings **SBR__ or TBR__**