


SFC Precision bar

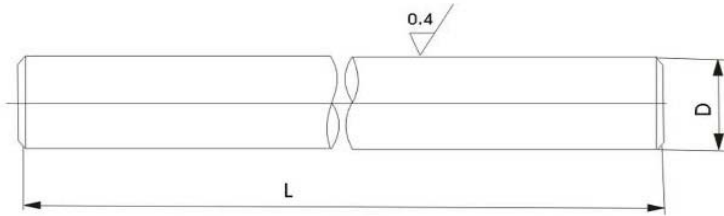

Model	Outer Diameter	Diameter Tolerance		Depth of Effective Hardened Layer	Weight (kg/m)
		g6	h6		
SFC6	6	-0.004 -0.012	0 -0.008	>0.6	0.22
SFC8	8	-0.005 -0.014	0 -0.009		0.4
SFC10	10	-0.005 -0.014	0 -0.009	>1.0	0.62
SFC12	12	-0.006 -0.017	0 -0.011		0.89
SFC13	13				1.04
SFC16	16	-0.007 -0.02	0 -0.013	>1.5	1.58
SFC20	20				2.47
SFC25	25			3.85	
SFC30	30	-0.009 -0.025	0 -0.016	>1.8	5.5
SFC35	35				7.55
SFC40	40			>2.2	
SFC50	50	15.4			