

# Efficient and Convenient Way to Test SMD Components

## Smart Tweezers™

### LCR Meter and Component Identifier in a Pair of Tweezers

- Built-in high-precision LCR probe
- Convenient one-hand operation
- Ideal for Surface Mount Devices
- Automatic component recognition
- Automatic test range selection
- Precise tips for small-size devices
- Manual and voltage test modes
- Diode Polarity/Short Testing
- Portable and ergonomic design



Smart Tweezers™ greatly simplifies testing and troubleshooting process.



Resistance, capacitance and inductance can be measured with automatic selection of the test parameters and range.

#### Advance Devices

250 Harding Blvd. West  
P.O. Box 32043  
Richmond Hill, ON L4C9S3  
Canada

Phone: 416-273-8994  
Fax: 416-352-5400  
Web: [www.advancedevices.com](http://www.advancedevices.com)

Smart Tweezers™ is a handheld LCR meter of a new concept. It provides a perfect solution for testing and identification of Surface Mount Devices as well as troubleshooting of complex electronic systems.

Its unique mechanical and electronic design combines a pair of precise gold-plated tweezers and a digital LCR meter in compact, lightweight, battery powered instrument. The probe is able to measure resistance, capacitance, inductance and voltage with high accuracy and automatic component recognition.

#### Testing Surface Mount Devices

Surface mount devices are usually tiny and without wire leads, making it more difficult to test and identify SMD than conventional components.

Smart Tweezers™ gives users an easy way to sort and evaluate loose components and to perform on-board measurements and debugging.

Precise gold-plated tweezers are able pick and reliably contact even the smallest SMD components and take measurements from already mounted devices. The probe can also be used to test conventional components with wire leads too short to insert into the test terminals.

#### Fully Automatic Measurements


Smart Tweezers™ automatically determines type of the component (resistance/capacitance/inductance) and selects proper range for high accuracy measurements.

Unit's display clearly indicates the type of the component, measurement result and test conditions.

#### Lightweight and Ergonomic

The integrated measurement head allow the operator to use one hand and focus attention on the tested component and on the job at hand. Sorting, testing and troubleshooting become more efficient and cost effective.



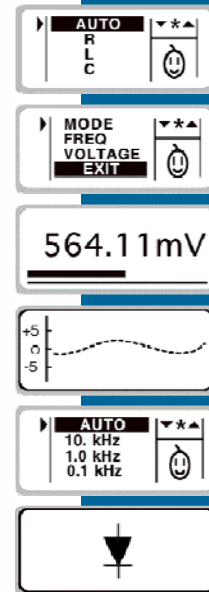

### Wide Spectrum of Additional Functions

Smart Tweezers™ has dual mode voltmeter function. In AUTO mode, the DC voltage is measured. In TRACE mode waveform of the AC signal is shown.

The unit can test diode polarity and indicate if it is short.

Smart Tweezers™ has a continuity detector with the beeper sound for resistance reading below threshold.

Every test function have a manual mode when where is a need to measure a specific circuit parameter—L, C, R or voltage.

<b>Physical Specifications</b>	Operating Temperature:	0 °C to +55 °C	
	Battery Type:	3 x 1.5V LR44 Alkaline or Air Zinc	
	Battery Life (continuous):	80 Hours Alkaline, 240 hours Zinc Air (typical)	
	Size:	14.0 x 2.5 x 3.0 cm (3.94 x 0.9 x 1.5 in)	
	Weight:	53 grams (0.11lb)	
<b>Basic Specifications</b>	Measured Parameters:	C+R (ESR), L+R, R	
	Measuring Frequencies:	100Hz, 1 kHz, 10kHz	
	Measurement rate:	4, 2, 1, 0.5 times per second (default 1)	
	DC Voltage:	0 to 800 mV (up to 8V with manual setting)	
	Resistance:	0.1 to 5 MOhm	
<b>Accuracy Specifications</b>	<b>Resistance:</b>	Range:	10 Ohm - 5 MOhm
		Accuracy:	1% + 0.02 in the range 10 Ohm - 5 MOhm
		Test Frequency:	1kHz
	<b>Capacitance:</b>	Range:	20pF - 4999µF
		Accuracy:	3% + 1.7pF* *Typical offset 1.6pF for 0402 size component
		Resolution:	0.1pF in the range 1pF- 100pF
		Test Frequency:	1kHz C >1000pF, 10kHz C <1000pF, 100Hz C >1µF
	<b>Inductance:</b>	Range:	10µH - 499mH
		Accuracy:	3% + 0.4µH** **Typical offset 1.4µH for 0402 size component
		Resolution:	0.1µH in the range 1µH - 100µH
	Test Frequency:	10kHz L <1mH, 1kHz L >1mH, 100Hz L <10mH	