


PET


Expansion ratio 1 to 2

Material : PET
Covering : ≥ 70%
Operating temperature : -50 to +130°C
Melting point : +260°C
Flame resistance : self-extinguishing (UL94 V2)
Specifications : UL94V2
 DIN 5510 S4/SR2/ST2
 NF F16-101 / F16-102 I2F2
 halogene free

Applications : sleeving with an expansion ratio from 1 to 2 for general use. It has been developed for rail industry.

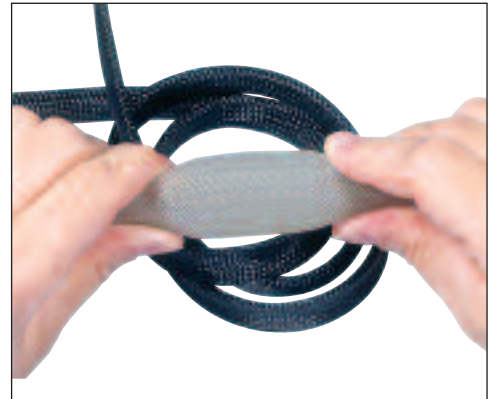


• Boxes

| type | | article number | | cover according to DIN 65164 | expansion in Ø (mm) | weight per 100 m g |  m |
|--------|--|----------------|---------------|------------------------------|---------------------|--------------------|--|
| | | black 010 | grey 013 | | | | |
| PET 3 | | 0624 0001 010 | 0624 0001 013 | 85% | 2 ... 6 | 275 | 100 |
| PET 4 | | 0624 0002 010 | 0624 0002 013 | 89% | 3 ... 8 | 410 | 100 |
| PET 5 | | 0624 0003 010 | 0624 0003 013 | 84% | 4 ... 10 | 470 | 100 |
| PET 6 | | 0624 0004 010 | 0624 0004 013 | 81% | 6 ... 12 | 530 | 100 |
| PET 8 | | 0624 0005 010 | 0624 0005 013 | 80% | 8 ... 16 | 650 | 100 |
| PET 10 | | 0624 0006 010 | 0624 0006 013 | 78% | 10 ... 20 | 790 | 100 |
| PET 12 | | 0624 0007 010 | 0624 0007 013 | 77% | 12 ... 24 | 925 | 50 |
| PET 15 | | 0624 0008 010 | 0624 0008 013 | 76% | 15 ... 27 | 1014 | 50 |
| PET 20 | | 0624 0009 010 | 0624 0009 013 | 70% | 19 ... 32 | 1240 | 25 |
| PET 25 | | 0624 0010 010 | 0624 0010 013 | 74% | 24 ... 38 | 1630 | 25 |
| PET 30 | | 0624 0011 010 | 0624 0011 013 | 77% | 28 ... 47 | 2050 | 25 |
| PET 40 | | 0624 0013 010 | 0624 0013 013 | 74% | 40 ... 63 | 2800 | 25 |
| PET 50 | | 0624 0015 010 | 0624 0015 013 | 79% | 45 ... 75 | 3350 | 25 |




• Industrial pack - on reel - long lengths

| type | | article number | | cover according to DIN 65164 | expansion in Ø (mm) | weight per 100 m g |  m |
|--------------|--|----------------|---------------|------------------------------|---------------------|--------------------|--|
| | | black 010 | grey 013 | | | | |
| PET 3 indus | | 0624 0201 010 | 0624 0201 013 | 85% | 2 ... 6 | 3450 | 1000 |
| PET 4 indus | | 0624 0202 010 | 0624 0202 013 | 89% | 3 ... 8 | 4800 | 1000 |
| PET 5 indus | | 0624 0203 010 | 0624 0203 013 | 84% | 4 ... 10 | 2600 | 400 |
| PET 6 indus | | 0624 0204 010 | 0624 0204 013 | 81% | 6 ... 12 | 2830 | 400 |
| PET 8 indus | | 0624 0205 010 | 0624 0205 013 | 80% | 8 ... 16 | 2700 | 300 |
| PET 10 indus | | 0624 0206 010 | 0624 0206 013 | 78% | 10 ... 20 | 3100 | 300 |
| PET 12 indus | | 0624 0207 010 | 0624 0207 013 | 77% | 12 ... 24 | 3500 | 300 |
| PET 15 indus | | 0624 0208 010 | 0624 0208 013 | 76% | 15 ... 27 | 3800 | 300 |
| PET 20 indus | | 0624 0209 010 | 0624 0209 013 | 70% | 19 ... 32 | 3200 | 200 |
| PET 25 indus | | 0624 0210 010 | 0624 0210 013 | 74% | 24 ... 38 | 4000 | 200 |
| PET 30 indus | | 0624 0211 010 | 0624 0211 013 | 77% | 28 ... 47 | 3800 | 150 |
| PET 40 indus | | 0624 0213 010 | 0624 0213 013 | 74% | 40 ... 63 | 3500 | 100 |
| PET 50 indus | | 0624 0215 010 | 0624 0215 013 | 79% | 45 ... 75 | 4100 | 100 |



• Dispenser box - short length (10 m)

| type | article number | | cover according to DIN 65164 | expansion in Ø (mm) | weight per 100 m g |  m |
|---------------|----------------|---------------|------------------------------|---------------------|--------------------|--|
| | black 010 | grey 013 | | | | |
| PET 3 x 10 m | 0624 0401 010 | 0624 0401 013 | 85% | 2 ... 6 | 185 | 10 |
| PET 4 x 10 m | 0624 0402 010 | 0624 0402 013 | 89% | 3 ... 8 | 199 | 10 |
| PET 5 x 10 m | 0624 0403 010 | 0624 0403 013 | 84% | 4 ... 10 | 205 | 10 |
| PET 6 x 10 m | 0624 0404 010 | 0624 0404 013 | 81% | 6 ... 12 | 210 | 10 |
| PET 8 x 10 m | 0624 0405 010 | 0624 0405 013 | 80% | 8 ... 16 | 220 | 10 |
| PET 10 x 10 m | 0624 0406 010 | 0624 0406 013 | 78% | 10 ... 20 | 235 | 10 |
| PET 12 x 10 m | 0624 0407 010 | 0624 0407 013 | 77% | 12 ... 24 | 250 | 10 |
| PET 15 x 10 m | 0624 0408 010 | 0624 0408 013 | 76% | 15 ... 27 | 257 | 10 |
| PET 20 x 10 m | 0624 0409 010 | 0624 0409 013 | 70% | 19 ... 32 | 250 | 10 |
| PET 25 x 10 m | 0624 0410 010 | 0624 0410 013 | 74% | 24 ... 38 | 287 | 10 |
| PET 30 x 10 m | 0624 0411 010 | 0624 0411 013 | 77% | 28 ... 47 | 330 | 10 |
| PET 40 x 10 m | 0624 0413 010 | 0624 0413 013 | 74% | 40 ... 63 | 405 | 10 |



PET-S


Expansion ratio 1 to 3

Material : PET
Covering : ≥ 55%
Operating temperature : -50 to +130°C
Melting point: +260°C
Flame resistance : self-extinguishing (UL94V2)
Specifications : UL94V2
 NF F16-101 / F16-102 I2F2
 halogene free

Applications : low cost sleeving with an expansion ratio from 1 to 3 for general use for smaller cover ratios.



• Box


| type | article number | | cover according to DIN 65164 | expansion in Ø (mm) | weight per 100 m g |  m |
|----------|----------------|---------------|------------------------------|---------------------|--------------------|--|
| | black 010 | grey 013 | | | | |
| PET-S 15 | 0624 0018 010 | 0624 0018 013 | 78% | 10 ... 30 | 1200 | 25 |
| PET-S 35 | 0624 0019 010 | 0624 0019 013 | 55% | 20 ... 60 | 1530 | 25 |



 A6/4-01



A6/5-02



C12/1-01 & A1/1-01



A4/4-03



Sleeves in lengths on request

