


MOTOR TYPE: 4,5 Nm, 5,5 A

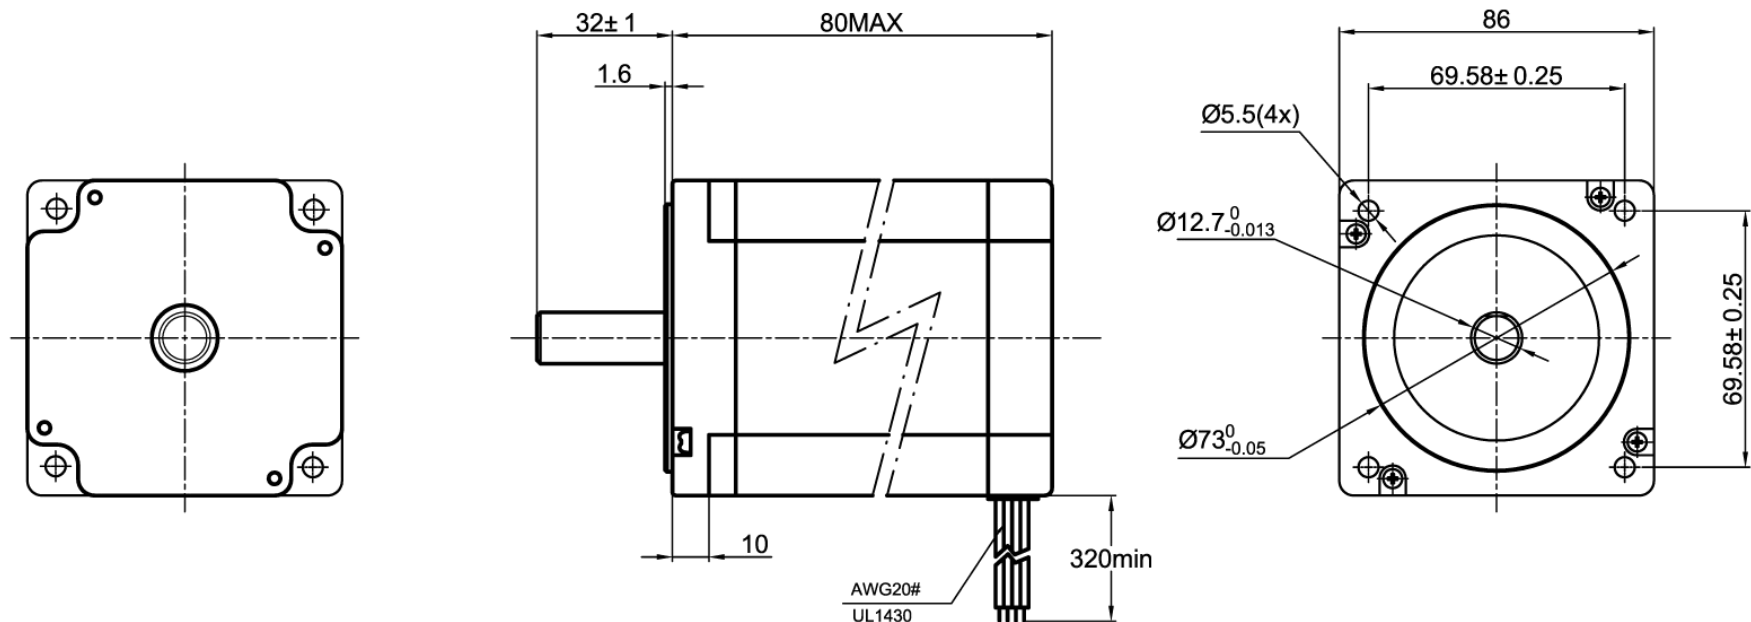

Common ratings:

Step angle	1.8°
Position accuracy	± 5%
Number of phase	2
Temp rise(Max.)	80° C
Dielectric strength	500VDC
Insulation resistance	100MOhm(500VDC)
Radial play	Max.0.025mm(Load 450g)
Axial play	Max.0.075mm(Load 920g)
Insulation class	B

Specification:

Current/Phase	5.5 A
DC Resistance	0.47 Ohm± 10%
Inductance/phase	4.0mH± 20%
Voltage	2.58 V
Holding torque	4.50Nm
Inertia	1600 g.cm <sup>2</sup>
Weight	2.4kg

Motor Connections

