

New - 2w LED Fittings

May 05

A recently introduced LED light source from Lumileds can now be fitted in these three popular Crescent fittings. The Luxeon star III has a rated output of 65 lumens when run at the recommended 700mA in 5500K white colour (warm white will be available in due course).


This output provides useful extra performance especially when mated with one of the standard lenses available in these units.

All these products will be clearly marked '2w' to avoid confusion with the earlier 1w, 350mA versions. The catalogue numbers have changed too for the same reason.




CLF2960 IP68 2w LED spot

Material: Body – 316L Stainless Steel,
Toughened glass cover.
Cable length – 1.5 metres.
Power supply: CRE 2784

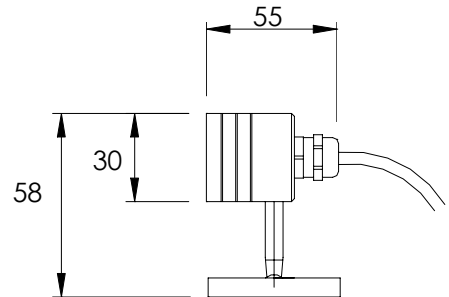


CLF2930 2w LED Downlight

Material: Body – Aluminium Alloy,
Toughened glass lens or cover.
Cable length – 1.5 metres.
Power supply: CRE 2784
Ceiling Cut out: Dia.40

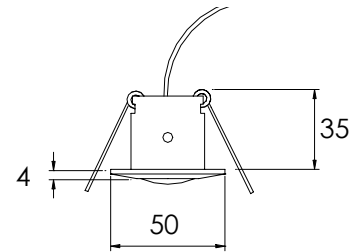


CLF2900 2w LED Paver

Material: Body – 316L Stainless Steel,
Toughened glass cover.
Cable length – 1.5 metres.
Power supply: CRE 2784

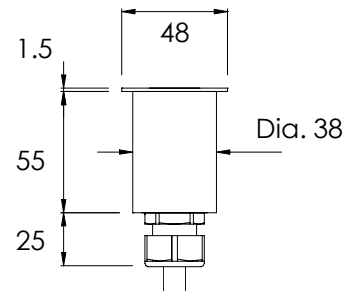

Full product numbers are made up as shown below. Please note that not all the alternatives shown are available for all products. If in doubt, check with the Crescent sales office.

Example: **CLF2930WLNLWHGF** is a white finished 2930 downlight with an unlened 2w Luxeon white LED, and a frosted glass cover

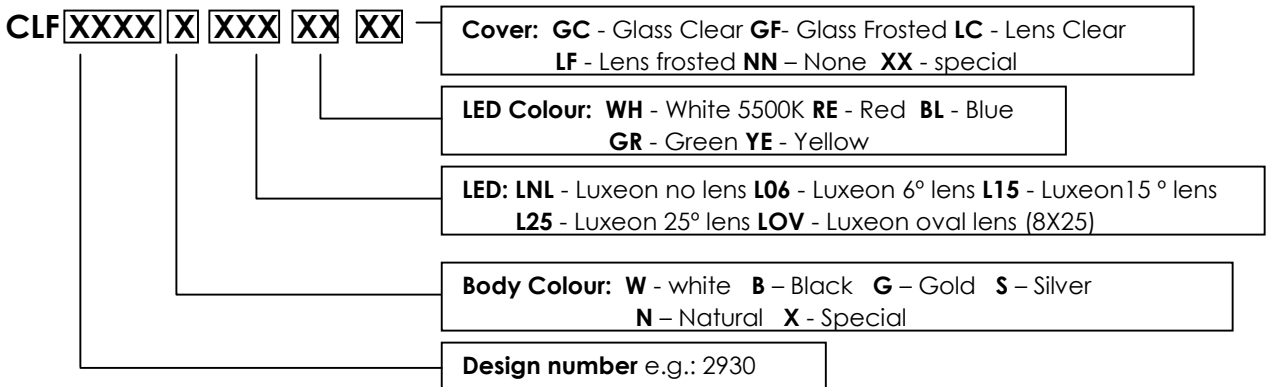

Crescent Lighting Limited, 8 Rivermead, Pipers Lane, Thatcham, Berkshire, RG19 4EP
 Telephone: +44 (0) 1635 878888 Facsimile: +44 (0) 1635 873888
 email address: sales@crescent.co.uk