


Features & Applications

- Utilizes high end UltraBright LED to ensure high intensity and good colour mixing
- Cast Aluminium IP55 housing
- Customizable to different LED angles to suit different applications
- Applicable for wall washing, architecture, stretch ceiling and special lightings

Dimensions

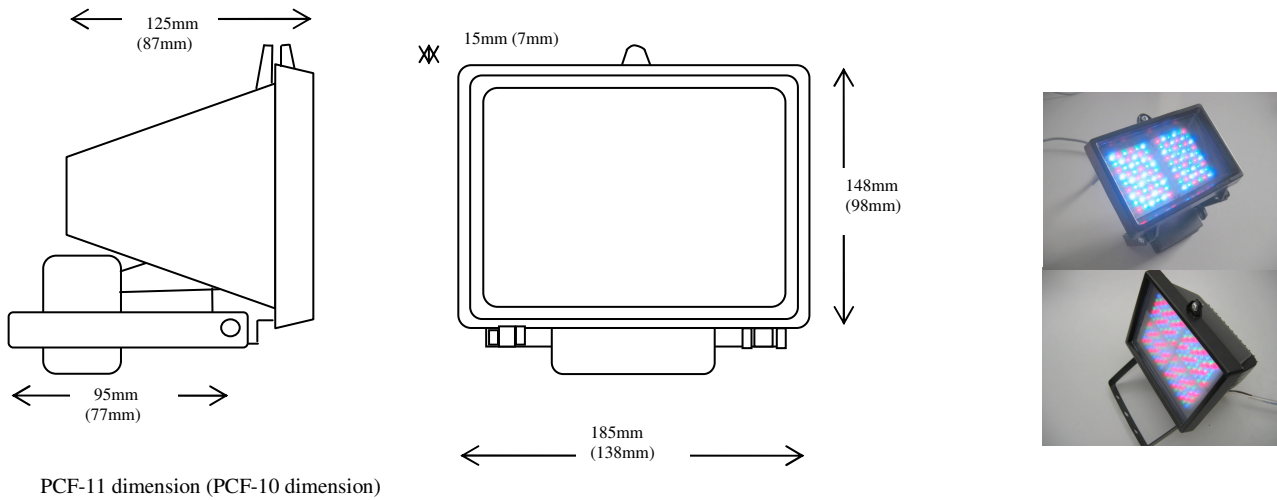

Product Specifications

Total number of LED	216 pcs for PCF-11, 108 for PCF-10
Types of LED	5mm UltraBright LED
LED Viewing Angle	30 deg / 60 deg / 100 deg
LED Luminous Intensity	30 deg R: 5500mcd, G: 8000mcd, B: 5500mcd 60 deg R: 1500mcd, G: 6000mcd, B: 2000mcd 100 deg R: 500mcd, G: 1500mcd, B: 750mcd
Nominal Operating Voltage	24 vdc
Max Power consumption	18 w for PCF-11, 9w for PCF-10
Estimated Lamp Life	50,000 hrs
External Controllers / Drivers	PCC-2, PCC-3, PCC-5 or DMX-3
Weight	Appr 2 kg
Operating Temperature	-5 ~+ 40 deg C

Models

PCF-10903	9w RGB Mini Flood Lamp with 30 deg LED
PCF-10906	9w RGB Mini Flood Lamp with 60 deg LED
PCF-10910	9w RGB Mini Flood Lamp with 100 deg LED
PCF-11803	18w RGB Mini Flood Lamp with 30 deg LED
PCF-11806	18w RGB Mini Flood Lamp with 60 deg LED
PCF-11810	18w RGB Mini Flood Lamp with 100 deg LED

Prime Light Pte Ltd reserves the right to change the specification without prior notification.