



Features & Applications

- Utilizes high end UltraBright LED to ensure high intensity and even mixing of colors within 2 inches (PCS-51002).
- Comes complete with plastic base to ensure easy handling and installation (bases not included for Flexible type)
- Customizable to different LED angles to suit different applications
- Flexible type available for contoured surfaces
- Applicable for cove, signage, bar top, wall washing, architecture, stretch ceiling and special lightings

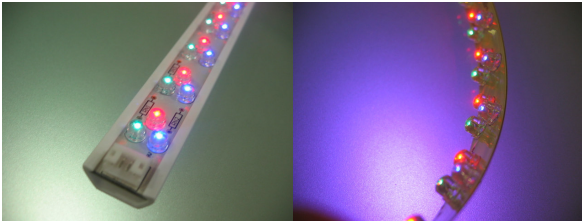

Dimensions

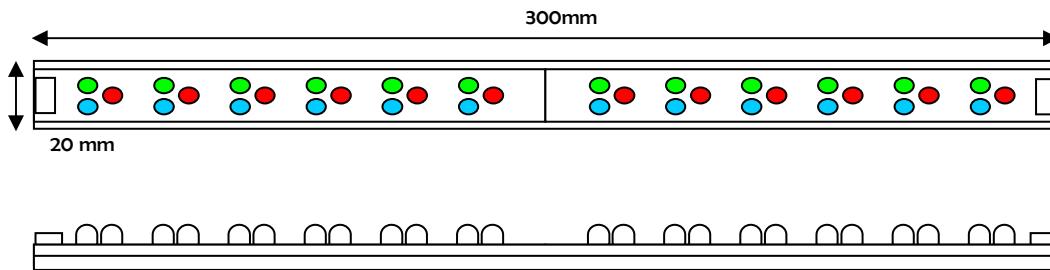

Product Specifications

Total number of LED (300mm or 12 inch length)	36 pcs, 12 each for RGB
Types of LED	5mm UltraBright LED
LED Viewing Angle	100 deg / 60 deg / 30 deg
LED Luminous Intensity	30 deg R: 5500mcd, G: 8000mcd, B: 5500mcd 60 deg R: 1500mcd, G: 6000mcd, B: 2000mcd 100 deg R: 500mcd, G: 1500mcd, B: 750mcd
Nominal Operating Voltage	24 vdc
Power consumption (300mm or 12 inch length)	3 watts at full RGB intensity
Estimated Lamp Life	50,000 hrs
Base / Holder	Full plastic base, not included for FL series
Connecting Wire	75mm with 4 pin connector on each end
External Controllers / Drivers	PCC-2, PCC-3, PCC-5 or DMX-3
Operating Temperature	-5 ~+ 40 deg C

Models

PCS-51002	Chameleon Strip 100 deg 300mm length	Change last digit to 1 for 150mm length, e.g. PCS-50601. Add FL after part number for Flexible models, e.g. PCS-51002FL.
PCS-50602	Chameleon Strip 60deg 300mm length	
PCS-50302	Chameleon Strip 30deg 300mm length	

Prime Light Pte Ltd reserves the right to change the specification without prior notification.