


4W 350mA

Catalog No. 901-004-350-U

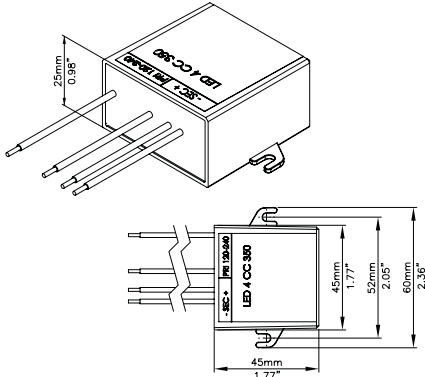


Load: 1-4VA
Input Voltage: 100-240V 50/60Hz
Output Current: 350mA ± 8%
Output Voltage: 2-14V
Dimensions: 45mm x 45mm x 25mm
 (1.77" x 1.77" x 0.98")
Weight: 3.2 ounces
Max Ambient Temp.: 50° C
IP Rating: 67

Description:
 Constant current 4 watt 350mA LED driver; 1-4VA load; 100-240v 50/60Hz input; 2-14V output; outdoor rated (IP67)

10W 350mA

Catalog No. 901-010-350-PU

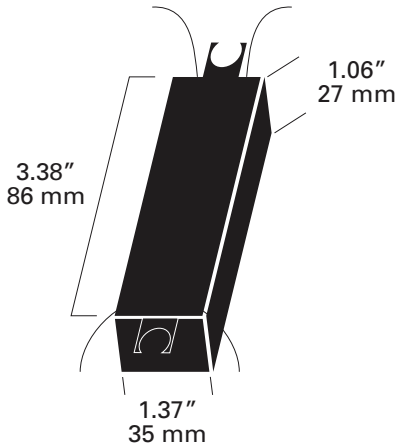


Load: 1-10VA
Input Voltage: 95-265V 50/60Hz
Output Current: 350mA ± 6%
Output Voltage: 2-28V
Dimensions: 27mm x 35mm x 86mm
 (1.06" x 1.37" x 3.38")
Weight: 5.8 ounces
Max Ambient Temp.: 50° C
IP Rating: 67

Description:
 Constant current 10 watt 350mA LED driver; 1-10VA load; 95-265v 50/60Hz input; 2-28V output; outdoor rated (IP67)

6W 700mA

Catalog No. 901-006-700-U

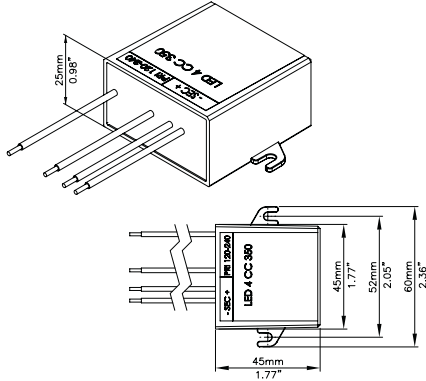


Load: 1.5-6VA
Input Voltage: 100-240V 50/60Hz
Output Current: 700mA ± 50mA
Output Voltage: 2-10V
Dimensions: 45mm x 45mm x 25mm
 1.77" x 1.77" x 0.98"
Weight: 3.2 ounces
Max Ambient Temp.: 50° C
IP Rating: 67

Description:

Constant current 6 watt 700mA LED driver; 1.5-6VA load; 100-240v 50/60Hz input; 2-10V output; outdoor rated (IP67)

10W 700mA

Catalog No. 901-010-700-PU

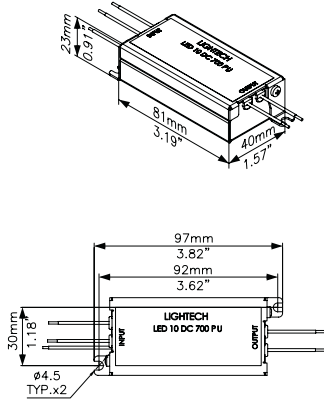


Load: 2-10VA
Input Voltage: 100-265V 50/60Hz
Output Current: 700mA ± 50mA
Output Voltage: 2.3-15V
Dimensions: 28mm x 40mm x 100mm
 (0.91" x 1.57" x 3.19")
Weight: 5.45 ounces
Max Ambient Temp.: 50° C
IP Rating: 67

Description:

Constant current 10 watt 700mA LED driver; 2-10VA load; 100-265v 50/60Hz input; 2.3-15V output; outdoor rated (IP67)

18W 700mA

Catalog No. 901-018-700-PU

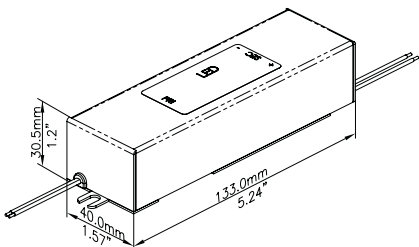

Load: 2-18VA
Input Voltage: 100-265V 50/60Hz
Output Current: 700mA ± 50mA
Output Voltage: 3-30V
Dimensions: 30.5mm x 40mm x 133mm
 (1.2" x 1.57" x 5.24")
Weight: 10.58 ounces
Max Ambient Temp.: 50° C
IP Rating: 67

Description:

Constant current 18 watt 700mA LED driver; 2-18VA load; 100-265v 50/60Hz input; 3-30V output; outdoor rated (IP67)

10W 12V DC

3.38"
86 mm

1.06"
27 mm

1.37"
35 mm

aluminium

Load: 1-10VA

Input Voltage: 95-265V 50/60Hz

Output Voltage: 12V ± 10%

Dimensions: 27mm x 35mm x 85mm
(1.06" x 1.37" x 3.38")

Weight: 5.8 ounces

Max Ambient Temp.: 50° C

IP Rating: 67

Catalog No. 901-010-012-PU

Description:
Constant voltage 10 watt 12 volt LED driver; 1-10VA load; 95-265v 50/60Hz input; 12V output ±10%; outdoor rated (IP67)

25W 12V DC

Load: 1-25VA

Input Voltage: 90-277V 50/60Hz

Output Voltage: 12V DC ± 10%

Dimensions: 30mm x 43mm x 157mm
(1.2" x 1.7" x 6.2")

Weight: 4.9 ounces

Max Ambient Temp.: 50° C

IP Rating: 67

Catalog No. 901-025-012-PU

Description:
Constant voltage 25 watt 12 volt LED driver; 1-25VA load; 90-277v 50/60Hz input; 12V output ±10%; outdoor rated (IP67)

60W DC 12V

40.0 mm

182.0 mm

44.0 mm

190.0 mm

7.48 mm

198.0 mm

7.8 mm

34.0 mm

1.34"

44.0 mm

Load: 1-60VA

Input Voltage: 100-277V 50/60Hz

Output Voltage: 12-13.5V

Dimensions: 198mm x 44mm x 40mm
7.8" x 1.73" x 1.57"

Weight: 20 ounces

Max Ambient Temp.: 50° C



IP Rating: 67

Catalog No. 901-060-012-PU

Description:
Constant voltage 60 watt 12 volt LED driver; 1-60VA load; 100-277v 50/60Hz input; 12-13.5V output; outdoor rated (IP67)

100W 12V DC

Catalog No. 901-100-012-PU

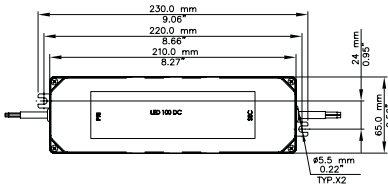

Load: 1-100VA

Input Voltage: 100-277V 50/60Hz

Output Voltage: 12V DC \pm 10%

Dimensions: 230mm x 65mm x 42mm
(9.06" x 2.56" x 1.65")

Weight: 28.2 ounces

Max Ambient Temp.: 50° C


IP Rating: 67

Description:

Constant voltage 100 watt 12 volt LED driver; 1-100VA load; 100-277v 50/60Hz input; 12V output \pm 10%; outdoor rated (IP67)

10W 24V DC

Catalog No. 901-010-024-PU

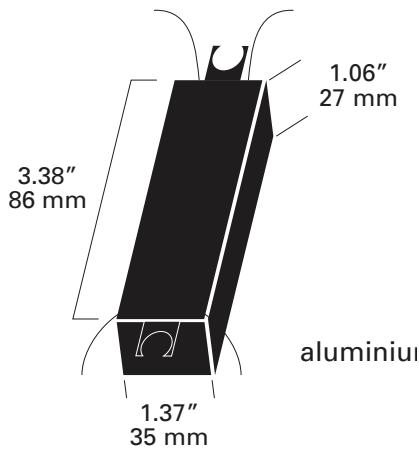

Load: 1-10VA

Input Voltage: 95-265V 50/60Hz

Output Voltage: 24V DC \pm 10%

Dimensions: 27mm x 35mm x 85mm
(1.06" x 1.37" x 3.38")

Weight: 5.8 ounces

Max Ambient Temp.: 50° C

IP Rating: 67

Description:

Constant voltage 10 watt 24 volt LED driver; 1-10VA load; 95-265v 50/60Hz input; 24V output \pm 10%; outdoor rated (IP67)

25W 24V DC

Catalog No. 901-025-024-PU



Load: 1-25VA

Input Voltage: 90-277V 50/60Hz

Output Voltage: 24V DC \pm 10%

Dimensions: 30mm x 43mm x 157mm
(1.2" x 1.7" x 6.18")

Weight: 4.93 ounces

Max Ambient Temp.: 50° C

IP Rating: 67



Description:

Constant voltage 25 watt 24 volt LED driver; 1-25VA load; 90-277v 50/60Hz input; 24V output \pm 10%; outdoor rated (IP67)

60W 24V DC



Catalog No. 901-060-024-PU

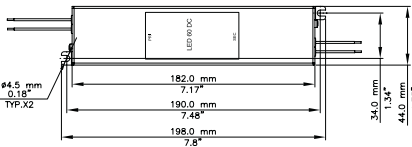

Load: 1-60VA

Input Voltage: 100-277V 50/60Hz

Output Voltage: 24-26.4V

Dimensions: 198mm x 44mm x 40mm
(7.8" x 1.73" x 1.57")

Weight: 20 ounces

Max Ambient Temp.: 50° C

IP Rating: 67



Description:

Constant voltage 60 watt 24 volt LED driver; 1-60VA load; 100-277v 50/60Hz input; 24-26.4V output; outdoor rated (IP67)

100W 24V DC



Catalog No. 901-100-024-PU

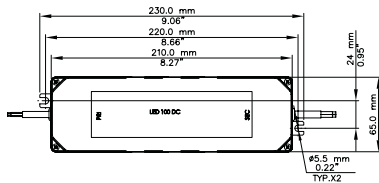

Load: 1-100VA

Input Voltage: 100-277V 50/60Hz

Output Voltage: 24V DC ± 10%

Dimensions: 230mm x 65mm x 42mm
(9.06" x 2.56" x 1.65")

Weight: 28.2 ounces

Max Ambient Temp.: 50° C

IP Rating: 67

Description:

Constant voltage 100 watt 24 volt LED driver; 1-100VA load; 100-277v 50/60Hz input; 24V output ±10%; outdoor rated (IP67)

