
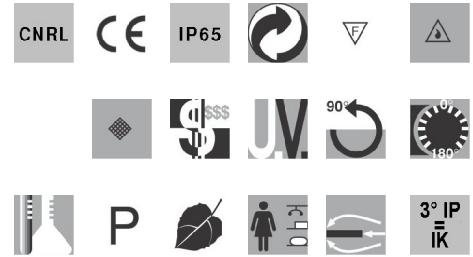



1144 Litio with LED

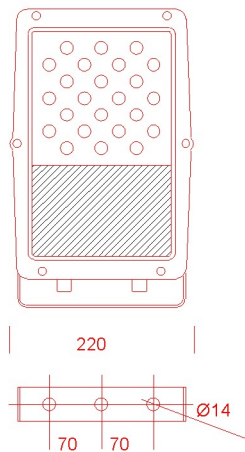

Code	px no. pack.	Kg	Watt	Colour	Dimensions
313367-00	1	4.50	LED	Al. Track	360x0x0
313368-00	1	6.90	LED POWERLED BIA	Al. Track	

Housing/frame: In die-cast aluminium with wide cooling fins.

Diffuser: Tempered glass, 5 mm thick, thermal shock and impact resistant. (UNI7142 tests British standard 3193).

Painting: With epoxy-polyester powder, black or sand blasted silver, resistant to corrosive and saline environments.

Lampholder: In ceramics, with silver-plated contacts. Socket Rx7s.

Equipment: Gasket in silicone rubber material. Cable gland in f.g. nylon, Ø 1/2 gas thread. Retained steel screws with special anticorrosion and anti-gripping treatment. Bracket in stainless steel with protractor scale. The hinge-opening front frame stays hooked to the fixture housing.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK08 degree of protection according to EN 60529 standards.

Wind surface: 900 sqcm.