



Q u a L E D THE ESSENCE OF LIGHT

Our LED Lighting evokes a calm, pure and soft atmosphere which turns your perception of light into an artistic experience. The changing RGB colours bring the intensity of time and space to life.

Thousands of feet under the sea a new world of bioluminescence was discovered, light produced by plankton and other deep sea animals. Inspired by their beauty, we have invented a technology to bring this fascinating and wonderful light to the surface.

Enjoy the harmony of QuaLED Lighting.


LED STRIP

0335 12VW

0335 12V

5050 12VW

5050 12V



LED strip with 96pcs/m, 0335 Side Emitting SMD LED, DC12V, waterproof, 5mts per roll.

Part number	Size (mm)	Weight	Rated Voltage	Rated Current	Power	Protection Level	Colour	Wave Length	Angle	Intensity (mcd)	Led Nos.
0335UR-480-12VFW	L5000xH8xT3	150g	12VDC	3.2A	38.4W	Ip68	R	623±5nm	120°	200	480
0335UY-480-12VFW	L5000xH8xT3	150g	12VDC	3.2A	38.4W	Ip68	Y	590±5nm	120°	200	480
0335UB-480-12VFW	L5000xH8xT3	150g	12VDC	3.2A	38.4W	Ip68	B	465±5nm	120°	200	480
0335UG-480-12VFW	L5000xH8xT3	150g	12VDC	3.2A	38.4W	Ip68	G	520±5nm	120°	600	480
0335UW-480-12VFW	L5000xH8xT3	150g	12VDC	3.2A	38.4W	Ip68	W	x=0.31 y=0.32	120°	600	480



LED STRIP

0335 12VW

0335 12V

5050 12VW

5050 12V

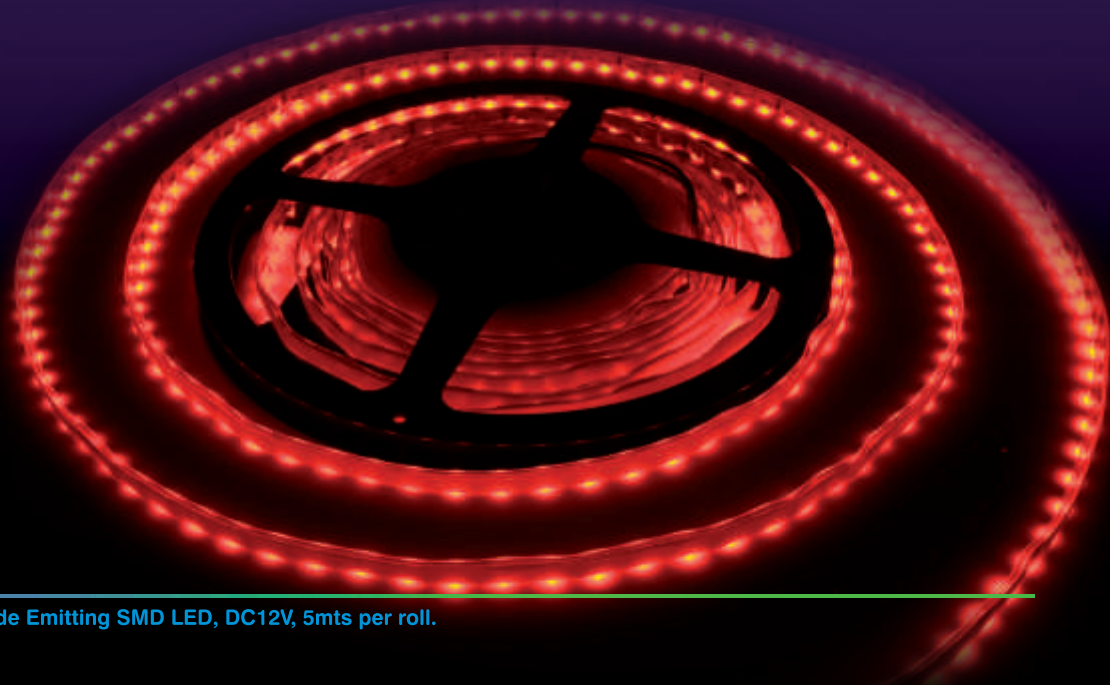

LED strip with 96pcs/m, 0335 Side Emitting SMD LED, DC12V, 5mts per roll.

Part number	Size (mm)	Weight	Rated Voltage	Rated Current	Power	Protection Level	Colour	Wave Length	Angle	Intensity (mcd)	Led Nos.
0335UR-480-12VF	L5000xH8xT3	150g	12VDC	3.2A	38.4W	-	R	623±5nm	120°	200	480
0335UY-480-12VF	L5000xH8xT3	150g	12VDC	3.2A	38.4W	-	Y	590±5nm	120°	200	480
0335UB-480-12VF	L5000xH8xT3	150g	12VDC	3.2A	38.4W	-	B	465±5nm	120°	200	480
0335UG-480-12VF	L5000xH8xT3	150g	12VDC	3.2A	38.4W	-	G	520±5nm	120°	600	480
0335UW-480-12VF	L5000xH8xT3	150g	12VDC	3.2A	38.4W	-	W	x=0.31 y=0.32	120°	600	480



LED STRIP

0335 12VW

0335 12V

5050 12VW

5050 12V

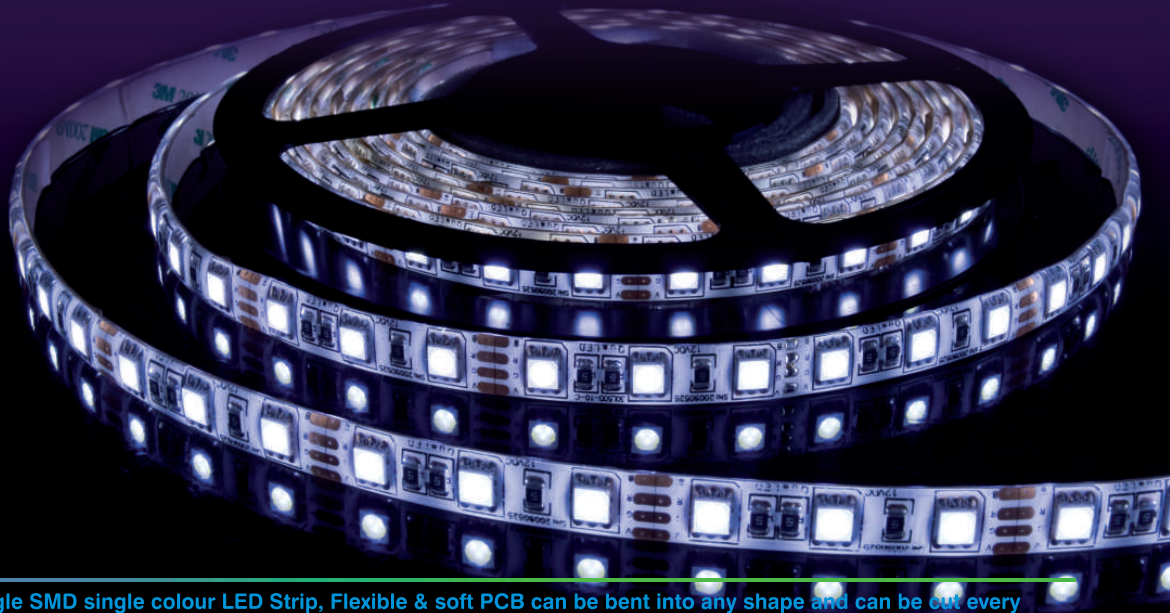

3-chip-in-1 Wide viewing angle SMD single colour LED Strip, Flexible & soft PCB can be bent into any shape and can be cut every 3 LED's. The LED Strip is waterproof.

Part number	Size (mm)	Weight	Rated Voltage	Rated Current	Power	Protection Level	Colour	Wave Length	Angle	Intensity (mcd)	Led Nos.
5050UR3-300-12VWF	L5000*W10*T2	170g	12VDC	6A	90W	Ip65	R	623±5nm	120°	1890	300
5050UY3-300-12VWF	L5000*W10*T2	170g	12VDC	6A	90W	Ip65	Y	585±5nm	120°	1890	300
5050UG3-300-12VWF	L5000*W10*T2	170g	12VDC	6A	90W	Ip65	G	520±5nm	120°	3780	300
5050UB3-300-12VWF	L5000*W10*T2	170g	12VDC	6A	90W	Ip65	B	465±5nm	120°	1008	300
5050UW3-300-12VWF	L5000*W10*T2	170g	12VDC	6A	90W	Ip65	W	0.33, 0.33	120°	3360	300
5050UWY3-300-12VWF	L5000*W10*T2	170g	12VDC	6A	90W	Ip65	Warm W	3200±2200K	120°	3360	300


LED STRIP

0335 12VW

0335 12V

5050 12VW

5050 12V



3-chip-in-1 Wide viewing angle SMD single colour LED Strip, Flexible & soft PCB can be bent into any shape and can be cut every 3 LED's.

Part number	Size (mm)	Weight	Rated Voltage	Rated Current	Power	Protection Level	Colour	Wave Length	Angle	Intensity (mcd)	Led Nos.
5050UR3-300-12VF	L5000*W10*T2	90g	12VDC	6A	90W	-	R	623±5nm	120°	1890	300
5050UY3-300-12VF	L5000*W10*T2	90g	12VDC	6A	90W	-	Y	585±5nm	120°	1890	300
5050UG3-300-12VF	L5000*W10*T2	90g	12VDC	6A	90W	-	G	520±5nm	120°	3780	300
5050UB3-300-12VF	L5000*W10*T2	90g	12VDC	6A	90W	-	B	465±5nm	120°	1008	300
5050UW3-300-12VF	L5000*W10*T2	90g	12VDC	6A	90W	-	W	0.33, 0.33	120°	3360	300
5050UWY3-300-12VF	L5000*W10*T2	90g	12VDC	6A	90W	-	Warm W	3200±2200K	120°	3360	300

LED MODULE


1W Module

3 LED Module

4 LED Module

Thru-hole LED Board

Super Flux LED Board




High Power LED module with 1W LED, can be cut every 3 modules.

Part number	Size (mm)	Weight	Rated Voltage	Rated Current	Power	Protection Level	Colour	Wave Length	Angle	Intensity (mcd)	Led Nos.
1008UW-03-12V	φ36	20g	12VDC	300mA	1.2W	-	white	x=0.31 y=0.32	120°	210	1

LED MODULE

- 1W Module
- 3 LED Module
- 4 LED Module
- Thru-hole LED Board
- Super Flux LED Board



The 3 LED module is available in many colours, also with adjustable viewing angle. It has two tail-pieces at the ends for easy installation. Thanks to its unique waterproof treatment, 3 LED module can be used in moist environments.

Part number	Size (mm)	Weight	Rated Voltage	Rated Currence	Power	Protection Level	Colour	Wave Lenght	Angle	Intensity (mcd)	Led Nos.
1044UR-03-12VW	L57*W20*H12	20g	12VDC	40mA	0.48W	Ip65	R	623±5nm	120°	250	3
1044UY-03-12VW	L57*W20*H12	20g	12VDC	40mA	0.48W	Ip65	Y	585±5nm	120°	250	3
1044UG-03-12VW	L57*W20*H12	20g	12VDC	25mA	0.30W	Ip65	G	520±5nm	120°	500	3
1044UB-03-12VW	L57*W20*H12	20g	12VDC	25mA	0.30W	Ip65	B	465±5nm	120°	120	3
1044UW-03-12VW	L57*W20*H12	20g	12VDC	25mA	0.30W	Ip65	W	x=0.31 y=0.32	120°	500	3

LED MODULE


1W Module

3 LED Module

4 LED Module

Thru-hole LED Board

Super Flux LED Board

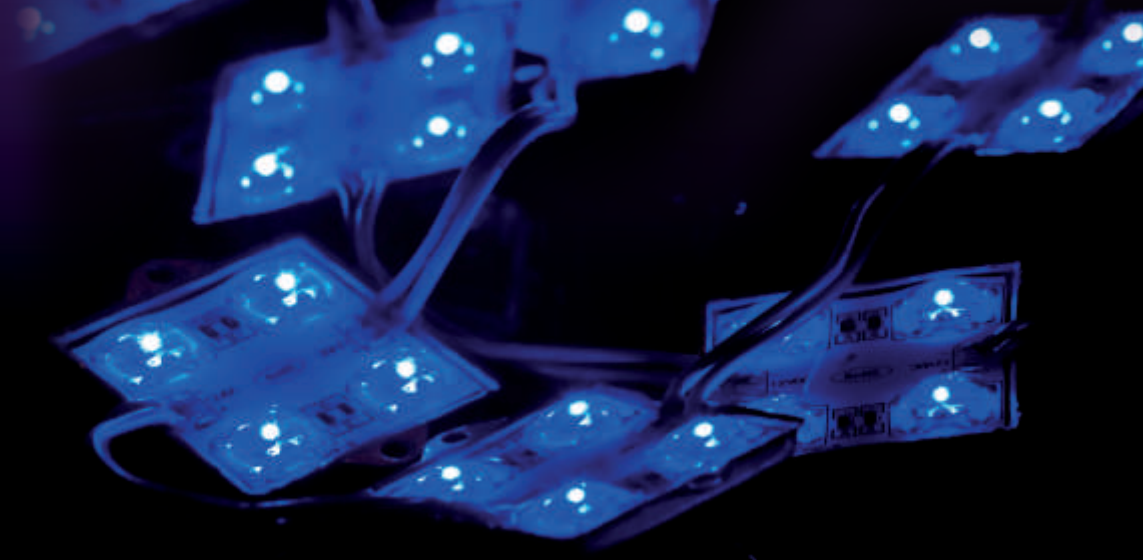

The 4 LED module is available in many colours, also with adjustable viewing angle. It has two tail-pieces at the ends for easy installation. Thanks to its unique waterproof treatment, 4 LED module can be used in moist environments.

Part number	Size (mm)	Weight	Rated Voltage	Rated Current	Power	Protection Level	Colour	Wave Length	Angle	Intensity (mcd)	Led Nos.
1044UR-04-12VW	L45*W36*H16	10g	12VDC	40mA	0.48W	Ip65	R	623±5nm	120°	250	4
1044UY-04-12VW	L45*W36*H16	10g	12VDC	40mA	0.48W	Ip65	Y	585±5nm	120°	250	4
1044UG-04-12VW	L45*W36*H16	10g	12VDC	40mA	0.65W	Ip65	G	520±5nm	120°	500	4
1044UB-04-12VW	L45*W36*H16	10g	12VDC	40mA	0.65W	Ip65	B	465±5nm	120°	120	4
1044UW-04-12VW	L45*W36*H16	10g	12VDC	40mA	0.65W	Ip65	W	x=0.31 y=0.32	120°	500	4

LED MODULE


1W Module

3 LED Module

4 LED Module

Thru-hole LED Board

Super Flux LED Board





Through-hole LED board with a LED dot matrix used to backlight a large area. The LED is interchangeable with other types of LED's.

Part number	Size (mm)	Weight	Rated Voltage	Rated Currence	Power	Protection Level	Colour	Wave Lenght	Angle	Intensity (mcd)	Led Nos.
3004UR-27-12V	L200*W67*H1.8	45g	12VDC	180mA	2.16W	-	R	623±5nm	15°	27	1500
3004UY-27-12V	L200*W67*H1.8	45g	12VDC	180mA	2.16W	-	Y	585±5nm	15°	27	1500
3004UG-27-12V	L200*W67*H1.8	45g	12VDC	180mA	2.16W	-	G	520±5nm	15°	27	3000
3004UB-27-12V	L200*W67*H1.8	45g	12VDC	180mA	2.16W	-	B	465±5nm	15°	27	1000
3004UW-27-12V	L200*W67*H1.8	45g	12VDC	180mA	2.16W	-	W	x=0.31 y=0.32	15°	27	3000

LED MODULE

- 1W Module
- 3 LED Module
- 4 LED Module
- Thru-hole LED Board
- Super Flux LED Board

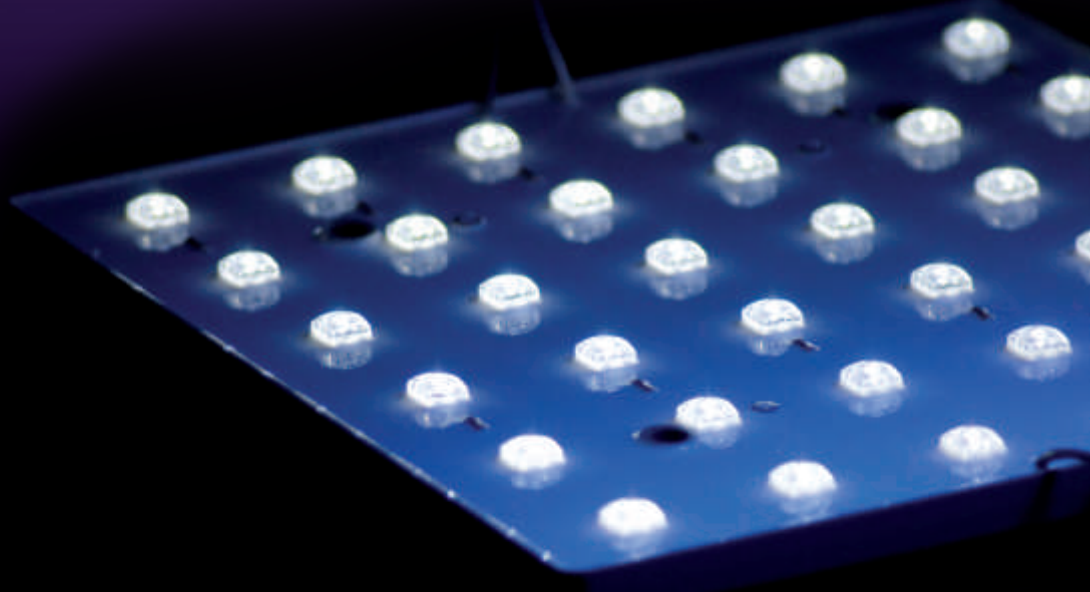


Super flux LED board with unique waterproof treatment and LED dot matrix. Specially designed for exterior backlighting.

Part number	Size (mm)	Weight	Rated Voltage	Rated Currence	Power	Protection Level	Colour	Wave Lenght	Angle	Intensity (mcd)	Led Nos.
1044UR-36-12VW	L203*W203*H10	370g	12VDC	240mA	2.88W	Ip67	R	623±5nm	120°	36	250
1044UY-36-12VW	L203*W203*H10	370g	12VDC	240mA	2.88W	Ip67	Y	585±5nm	120°	36	250
1044UG-36-12VW	L203*W203*H10	370g	12VDC	240mA	2.88W	Ip67	G	520±5nm	120°	36	500
1044UB-36-12VW	L203*W203*H10	370g	12VDC	240mA	2.88W	Ip67	B	465±5nm	120°	36	120
1044UW-36-12VW	L203*W203*H10	370g	12VDC	240mA	2.88W	IP67	W	x=0.31 y=0.32	120°	36	500

CREE

CREE Chip



3-chip-in-1 SMD LED module is three times brighter than other single chip SMD LED. Unique waterproof treatment technique ensures the moist condition using.

Part number	Size (mm)	Weight	Rated Voltage	Rated Current	Power	Protection Level	Colour	Wave Length	Angle	Intensity (mcd)	Flux (lm)	Led Nos.
5050UW3-02-12VW-C	L32*W16*H10	15g	12VDC	40mA	0.48W	Ip65	white	x=0.31, y=0.32	120°	5000	42	2
3528UW-03-12VW-C	L37*W14*H5	5g	12VDC	20mA	0.24W	Ip65	white	x=0.31, y=0.32	120°	1500	22,5	3
5050UW3-04-12VW-C	L31*W31*H10	15g	12VDC	100mA	1.2W	Ip65	white	x=0.31, y=0.32	120°	5000	84	4

LED STRIP-FLEXI


Normal

Waterproof

RGB Normal

RGB Waterproof

LED Flexible Listel Light



Wide viewing angle LED Strip, flexible & soft PCB can be formed into almost any shape. The length is adjustable and can be cut after every three LED's. LED strip is highly recommended for applications like backlighting of signs, advertising, design interiors etc. Transform your fantastic ideas into reality and enjoy the new dimensions of lighting.

Part number	Size (mm)	Weight	Rated Voltage	Rated Currence	Power	Protection Level	Colour	Wave Lenght	Angle	Intensity (mcd)	Led Nos.
3528UR-330-12VF	L5000*W8*T2	80g	12VDC	2200mA	26.4W	-	R	623±5nm	120°	200	330
3528UY-330-12VF	L5000*W8*T2	80g	12VDC	2200mA	26.4W	-	Y	585±5nm	120°	200	330
3528UG-330-12VF	L5000*W8*T2	80g	12VDC	2200mA	26.4W	-	G	520±5nm	120°	600	330
3528UB-330-12VF	L5000*W8*T2	80g	12VDC	2200mA	26.4W	-	B	465±5nm	120°	150	330
3528UW-330-12VF	L5000*W8*T2	80g	12VDC	2200mA	26.4W	-	W	x=0.31, y=0.32	120°	700	330

LED STRIP-FLEXI


Normal

Waterproof

RGB Normal

RGB Waterproof

LED Flexible Listel Light




Wide viewing angle LED Strip, flexible & soft PCB can be formed into almost any shape. The length is adjustable and can be cut after every three LED's. LED strip is highly recommended for applications like backlighting of signs, advertising, design interiors etc. Thanks to its unique waterproof design, LED Flexi Strip can be used in moist environments.

Part number	Size (mm)	Weight	Rated Voltage	Rated Current	Power	Protection Level	Colour	Wave Length	Angle	Intensity (mcd)	Led Nos.
3528UR-330-12VWF	L5000*W8*T3	145g	12VDC	2200mA	26.4W	Ip65	R	623±5nm	120°	200	330
3528UY-330-12VWF	L5000*W8*T3	145g	12VDC	2200mA	26.4W	Ip65	Y	585±5nm	120°	200	330
3528UG-330-12VWF	L5000*W8*T3	145g	12VDC	2200mA	26.4W	Ip65	G	520±5nm	120°	600	330
3528UB-330-12VWF	L5000*W8*T3	145g	12VDC	2200mA	26.4W	Ip65	B	465±5nm	120°	150	330
3528UW-330-12VWF	L5000*W8*T3	145g	12VDC	2200mA	26.4W	Ip65	W	x=0.31, y=0.32	120°	700	330

LED STRIP-FLEXI

Normal
Waterproof
RGB Normal
RGB Waterproof
LED Flexible Listel Light




Wide viewing angle LED strip is durable, easy to install and is maintenance free. It is adjustable and can be cut after every three LED's, allowing users to assemble the light according to desired length and shapes. Red, Green and Blue colours can be mixed with a simple remote control. Transform your fantastic ideas into reality and enjoy the new dimensions of lighting.

Part number	Size (mm)	Weight	Rated Voltage	Rated Currence	Power	Protection Level	Colour	Wave Lenght	Angle	Intensity (mcd)	Led Nos.
5050RGB -150-12VF	L5000*W10*T2	90g	12VDC	3000mA	36W	-	R	623±5nm	120°	600	150
5050RGB -150-12VF	L5000*W10*T2	90g	12VDC	3000mA	36W	-	G	520±5nm	120°	1300	150
5050RGB -150-12VF	L5000*W10*T2	90g	12VDC	3000mA	36W	-	B	465±5nm	120°	300	150

LED STRIP-FLEXI

Normal
Waterproof
RGB Normal
RGB Waterproof
LED Flexible Listel Light





Wide viewing angle LED strip, flexible & soft PCB can be formed into almost any shape. It is adjustable and can be cut after every three LED's. Red, Green and Blue colours can be mixed with a simple remote control. Transform your fantastic ideas into reality and enjoy the new dimensions of lighting.

Part number	Size (mm)	Weight	Rated Voltage	Rated Currence	Power	Protection Level	Colour	Wave Lenght	Angle	Intensity (mcd)	Led Nos.
5050RGB -150-12VWF	L5000*W10*T2	183g	12VDC	3000mA	36W	Ip65	R	623±5nm	120°	600	150
5050RGB -150-12VWF	L5000*W10*T2	183g	12VDC	3000mA	36W	Ip65	G	520±5nm	120°	1300	150
5050RGB -150-12VWF	L5000*W10*T2	183g	12VDC	3000mA	36W	Ip65	B	465±5nm	120°	300	150

LED STRIP-FLEXI

Normal
Waterproof
RGB Normal
RGB Waterproof
LED Flexible Listel Light

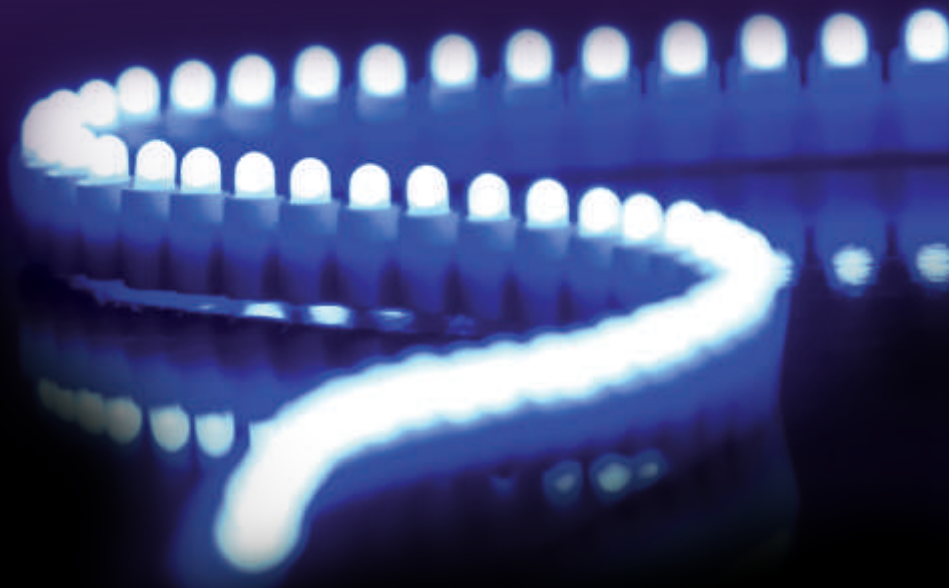

Wide viewing angle LED linear strip. Medium soft PCB allows it to be formed into many different shapes according to the user's requirements.

Item No.	Color of LED	Input Voltage	Lumens/Unit	Power Consumption	Current/Unit	Dimension	Max units with 12V 2.5A switch power	IP rating
LED-FLF-99-1M-R	R	12VDC	62.1	7.92W	600mA	1x7.6x12mm	3	44
LED-FLF-99-1M-G	G	12VDC	123	7.92W	600mA	1x7.6x12mm	3	44
LED-FLF-99-1M-B	B	12VDC	46.7	7.92W	600mA	1x7.6x12mm	3	44
LED-FLF-99-1M-Y	Y	12VDC	70.2	7.92W	600mA	1x7.6x12mm	3	44
LED-FLF-99-1M-W	W	12VDC	346.9	7.92W	600mA	1x7.6x12mm	3	44

LED STRIP-LINEAR

Linear Normal
Linear RGB Light



Wide viewing angle linear LED strip is durable, easy to install and is maintenance free. It is adjustable and can be cut after every three LED's, allowing users to assemble the light according to desired length and shapes.

Part number	Size (mm)	Weight	Rated Voltage	Rated Current	Power	Protection Level	Colour	Wave Length	Angle	Intensity (mcd)	Led Nos.
3528UR-15-12VL	L375*W10*T1	10g	12VDC	100mA	1.2W	-	R	623±5nm	120°	200	15
3528UY-15-12VL	L375*W10*T1	10g	12VDC	100mA	1.2W	-	Y	585±5nm	120°	200	15
3528UG-15-12VL	L375*W10*T1	10g	12VDC	100mA	1.2W	-	G	520±5nm	120°	600	15
3528UB-15-12VL	L375*W10*T1	10g	12VDC	100mA	1.2W	-	B	465±5nm	120°	150	15
3528UW-15-12VL	L375*W10*T1	10g	12VDC	100mA	1.2W	-	W	x=0.31, y=0.32	120°	700	15

LED STRIP-LINEAR

Linear Normal

Linear RGB Light



Wide viewing angle linear LED strip is durable, easy to install and is maintenance free. It is adjustable and can be cut after every three LED's, allowing users to assemble the light according to desired length and shapes. Red, Green and Blue colours can be mixed with a simple remote control.

Part number	Size (mm)	Weight	Rated Voltage	Rated Current	Power	Protection Level	Colour	Wave Length	Angle	Intensity (mcd)	Led Nos.
5050RGB -30-12VL	L572*W10*T1.6	21g	12VDC	600mA	7.2W	-	R	623±5nm	120°	600	30
5050RGB -30-12VL	L572*W10*T1.6	21g	12VDC	600mA	7.2W	-	G	520±5nm	120°	1300	30
5050RGB -30-12VL	L572*W10*T1.6	21g	12VDC	600mA	7.2W	-	B	465±5nm	120°	300	30

LED NEON-FLEX

Normal
Ultra Thin



Flexible & soft LED tube can be formed into almost any shape. LED neon flex is highly recommended for advertising, design, and interior decoration. Thanks to its unique waterproof design, LED neon flex can be used in moist environments.

Part number	Size (mm)	LED Spacing	Rated Voltage	Cutting Unit	Colour	Led Nos.
LN-FX-240V-R	DIA.:14*27.5mm 50M/RL	0.5"	240V	1.52M	Red	WITH 5 SETS ACCESSORIES
LN-FX-240V-Y	DIA.:14*27.5mm 50M/RL	0.5"	240V	1.52M	Yellow	WITH 5 SETS ACCESSORIES
LN-FX-240V-O	DIA.:14*27.5mm 50M/RL	0.5"	240V	1.52M	Orange	WITH 5 SETS ACCESSORIES
LN-FX-240V-B	DIA.:14*27.5mm 50M/RL	0.5"	240V	0.91M	Blue	WITH 5 SETS ACCESSORIES
LN-FX-240V-G	DIA.:14*27.5mm 50M/RL	0.5"	240V	0.91M	Green	WITH 5 SETS ACCESSORIES
LN-FX-240V-W	DIA.:14*27.5mm 50M/RL	0.5"	240V	0.91M	White	WITH 5 SETS ACCESSORIES
LN-FX-50M-240V-HP	DIA.:14*27.5mm 50M/RL	0.5"	240V	0.91M	Hot pink	WITH 5 SETS ACCESSORIES
LN-FX-RGB-240V	DIA.:20*26mm 25M/RL	0.5"	240V	0.91M	RGB	WITH 5 SETS ACCESSORIES

LED NEON-FLEX

Normal
Ultra Thin



Flexible & soft LED tube can be formed into almost any shape. LED neon flex is highly recommended for advertising, design, and interior decoration. Thanks to its unique waterproof design, LED neon flex can be used in moist environments.

Part number	Size (mm)	LED Spacing	Rated Voltage	Cutting Unit	Colour	Led Nos.
ULN-FX-50M-240V-R	8x25mm	120LED/UNIT, 42 UNITS/50M/ROLL	240V	1.2M	Red	WITH 5 SETS ACCESSORIES
ULN-FX-50M-240V-Y	8x25mm	120LED/UNIT, 42 UNITS/50M/ROLL	240V	1.2M	Yellow	WITH 5 SETS ACCESSORIES
ULN-FX-50M-240V-O	8x25mm	120LED/UNIT, 42 UNITS/50M/ROLL	240V	1.2M	Orange	WITH 5 SETS ACCESSORIES
ULN-FX-50M-240V-G	8x25mm	120LED/UNIT, 70 UNITS/50M/ROLL	240V	0.72M	Green	WITH 5 SETS ACCESSORIES
ULN-FX-50M-240V-B	8x25mm	120LED/UNIT, 70 UNITS/50M/ROLL	240V	0.72M	Blue	WITH 5 SETS ACCESSORIES
ULN-FX-50M-240V-W	8x25mm	120LED/UNIT, 70 UNITS/50M/ROLL	240V	0.72M	White	WITH 5 SETS ACCESSORIES

LED STRIP CONTROLLER

Normal
Wireless
LED DIM Controller
LED Power Repeater




Simple control panel for mixing up Red, Green and Blue LED colours.

Part number	Size (mm)	Weight	Rated Voltage
BJ-V300-DC12V	211×40×30 mm	200g	DC 12V

LED STRIP CONTROLLER

Normal
Wireless
LED DIM Controller
LED Power Repeater

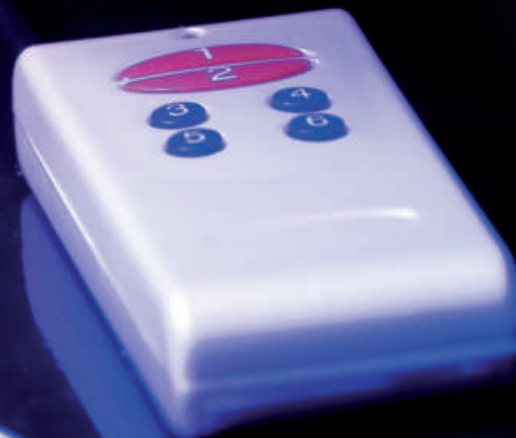

Simple remote control for mixing up Red, Green and Blue LED colours.

Part number	Size (mm)	Weight	Rated Voltage
BJ-V300RC-DC12V	211×40×30 mm	200g	DC 12V

LED STRIP CONTROLLER

- Normal
- Wireless
- LED DIM Controller
- LED Power Repeater



LED DIM controller.

Part number	Size (mm)	Weight	Power	Rated Voltage, Current Power
LT-311	211×40×30 mm	180g	180W	DC 12V

LED STRIP CONTROLLER

Normal
Wireless
LED DIM Controller
LED Power Repeater




Constant voltage power repeater.

Part number	Size (mm)	Weight	Power	Rated Voltage, Current Power
LT-3060	121×30×30 mm	300g	200W	DC 12V

LED WASHER

Wall Washer

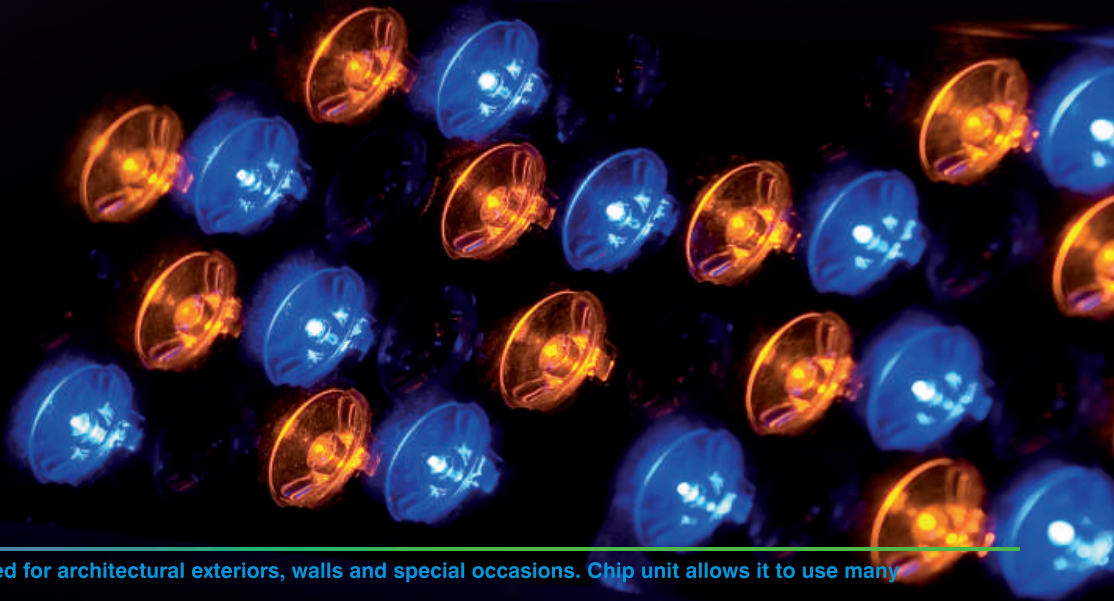

High power LED fitting can be used for architectural exteriors, walls and special occasions. Chip unit allows it to use many different light modes.

Item No.	Name	No. of LED	V/W	Spec	Material	Colour	Waterproof Level	Size
LX-L600-1W/3W	LED L600	15/18	220V 15/18/45/54W	R:50 H:52 L:600	Alloy	R G B Y W	Ip65	600mm
LX-L900-1W/3W	LED L900	25/30	220V 25/30/75/90W	R:50 H:52 L:900	Alloy	R G B Y W	Ip65	900mm
LX-L1200-1W/3W	LED L1200	30/36	220V 30/36/90/108W	R:50 H:52 L:1200	Alloy	R G B Y W	Ip65	1200mm

*available also in 240mm

LED POWER SUPPLY


Power Supply



12V power supply for different LED applications.

Part number	Size (mm)	Weight	Output Voltage	Output Current	Power	Packing
LPS-12U14	192X40X34mm	0.36kg	DC12±0.5V	1.25Amax	15W	20pcs/box
LPS-12U18	214X40X34mm	0.41kg	DC12±0.5V	1.67Amax	20W	20pcs/box
LPS-12U30	249X40X34mm	0.51g	DC12±0.5V	2.5Amax	30W	20pcs/box
LPS-12U40	238X45X40mm	0.68g	DC12±0.5V	3.34Amax	40W	20pcs/box
LPS-12U60	205X65X55mm	1.0kg	DC12±0.5V	5Amax	60W	10pcs/box
LPS-12U100	255X68X55mm	1.4kg	DC12±0.5V	8.4Amax	100W	10pcs/box
LPS-12U150	286X117X70mm	3.0kg	DC12±0.5V	12.5Amax	150W	5pcs/box

www.qualified.eu
www.qualified.cz
www.qualified.co.uk
www.qualified.com
www.qualified.ru

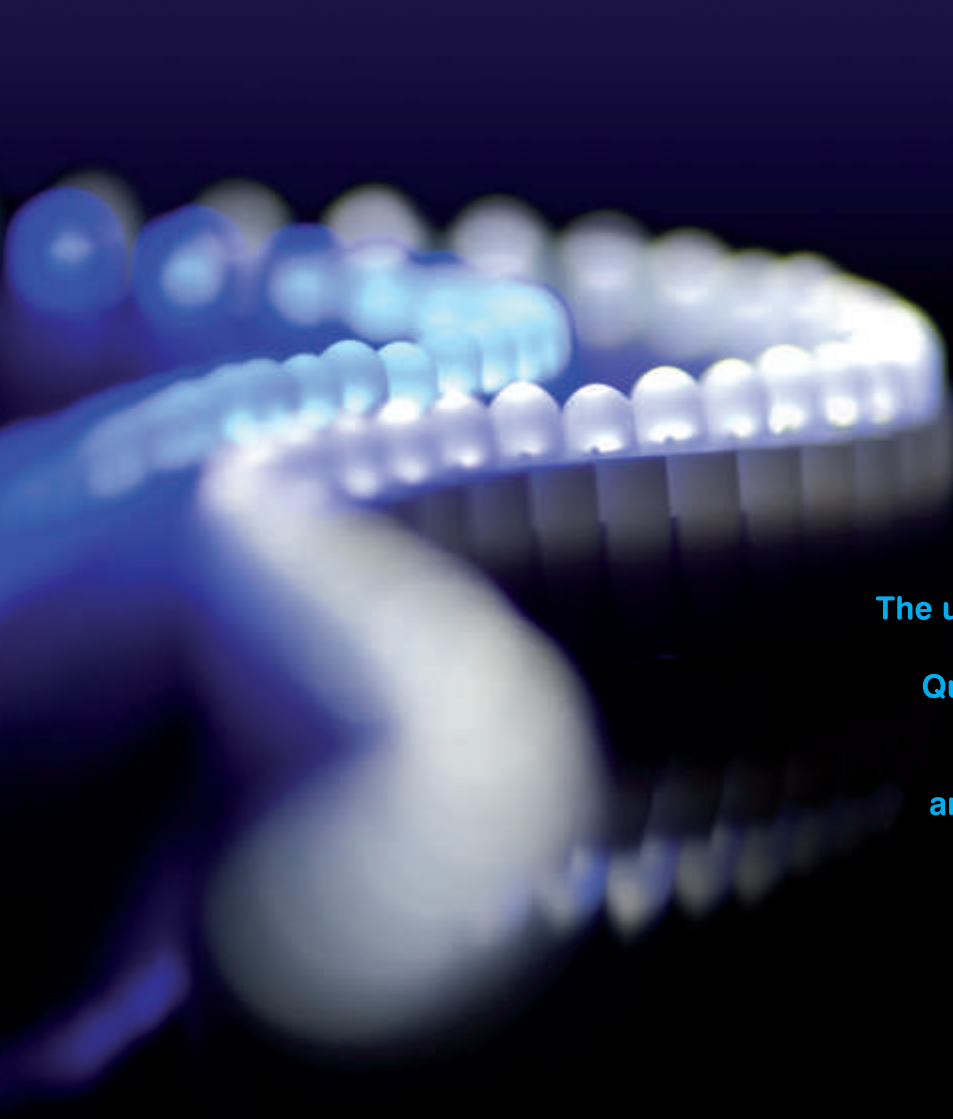

QuaLED

The unique beauty of LED lighting offers high energy savings. QuaLED proudly presents new, creative ways of advertising featuring both interior and exterior lighting solutions.