



## T8 LED Tube Light

### Features: (特性)

- 1) Long lifetime: >50,000hours  
使用寿命长达50000小时
- 2) Energy conservation: save 50% more energy compared with traditional fluorescent tube  
比传统荧光灯管节电50%以上
- 3) Eco-friendly: no UV or RF interference, no Mercury or Lead  
不产生紫外线, 没有电磁干扰, 不含汞或铅
- 4) Breakage resistance: Front side with PC and backside with aluminum  
正面采用PC材料, 背面采用铝材, 坚固耐用
- 5) Lumen maintenance: 70% at 30,000 hours  
工作30000小时后, 流明保持率为70%
- 6) Wide input voltage: 85-265VAC  
85-265V交流宽电压输入
- 7) Ambient temperature: -20°C ~50°C  
工作环境温度: -20°C ~50°C

### Strong Advantages: (产品优点)

- 1) The tube has passed 3750V resistance test  
产品通过了3750V高压耐压测试
- 2) Isolated power supply inside makes the tube much safer  
隔离式电源设计, 更加安全可靠
- 3) Adopt aluminum pcb for much better heat dissipation  
Pcb为铝基板, 具有非常好的散热功能

### Application: (应用范围)

Replacement for conventional fluorescent tube  
替代传统的荧光灯管

### Important notice: (特别提示)

Ballast and starter must be taken off before replacing the traditional fluorescent tube  
在替换传统荧光灯管前, 必须取下镇流器和启辉器

# T8 LED Tube Light



QS-T8



ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-T8-60CM-100W-SMD	SMD LED	Cool White	700lm	120°	85-265VAC	10W	589.8mm x $\varnothing$ 25.4mm
QS-T8-60CM-100MW-SMD	SMD LED	Commercial White	650lm	120°	85-265VAC	10W	589.8mm x $\varnothing$ 25.4mm
QS-T8-60CM-100WW-SMD	SMD LED	Warm White	600lm	120°	85-265VAC	10W	589.8mm x $\varnothing$ 25.4mm
QS-T8-120CM-200W-SMD	SMD LED	Cool White	1400lm	120°	85-265VAC	18W	1199.4mm x $\varnothing$ 25.4mm
QS-T8-120CM-200MW-SMD	SMD LED	Commercial White	1300lm	120°	85-265VAC	18W	1199.4mm x $\varnothing$ 25.4mm
QS-T8-120CM-200WW-SMD	SMD LED	Warm White	1200lm	120°	85-265VAC	18W	1199.4mm x $\varnothing$ 25.4mm

QS-T8



ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-T8-60CM-130W-SMD	SMD LED	Cool White	910lm	120°	85-265VAC	11.5W	589.8mm x $\varnothing$ 25.4mm
QS-T8-60CM-130MW-SMD	SMD LED	Commercial White	845lm	120°	85-265VAC	11.5W	589.8mm x $\varnothing$ 25.4mm
QS-T8-60CM-130WW-SMD	SMD LED	Warm White	780lm	120°	85-265VAC	11.5W	589.8mm x $\varnothing$ 25.4mm
QS-T8-120CM-260W-SMD	SMD LED	Cool White	1820lm	120°	85-265VAC	21.5W	1199.4mm x $\varnothing$ 25.4mm
QS-T8-120CM-260MW-SMD	SMD LED	Commercial White	1690lm	120°	85-265VAC	21.5W	1199.4mm x $\varnothing$ 25.4mm
QS-T8-120CM-260WW-SMD	SMD LED	Warm White	1560lm	120°	85-265VAC	21.5W	1199.4mm x $\varnothing$ 25.4mm
QS-T8-150CM-320W-SMD	SMD LED	Cool White	2240lm	120°	85-265VAC	22W	1500mm x $\varnothing$ 25.4mm
QS-T8-150CM-320MW-SMD	SMD LED	Commercial White	2080lm	120°	85-265VAC	22W	1500mm x $\varnothing$ 25.4mm
QS-T8-150CM-320WW-SMD	SMD LED	Warm White	1920lm	120°	85-265VAC	22W	1500mm x $\varnothing$ 25.4mm



## Slim LED Tube Light




### Features: (特性)

- 1) Long working lifetime: more than 50,000 hours  
使用寿命长达50,000小时
- 2) Two shapes are available: round and square  
可选择方形或圆形灯管
- 3) No UV or RF interference, no Mercury or Lead  
没有紫外线或电磁干扰, 不含汞或铅
- 4) Ambient temperature:  $-20^{\circ}\text{C} \sim 50^{\circ}\text{C}$   
工作环境温度:  $-20^{\circ}\text{C} \sim 50^{\circ}\text{C}$


### Application: (应用范围)

- 1) Cabinet lighting  
橱柜照明
- 2) Shelf lighting  
货架照明

QS-ALF

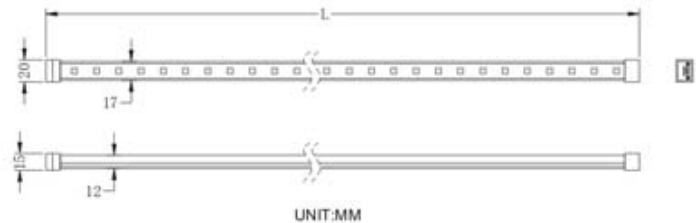

QS-ALR

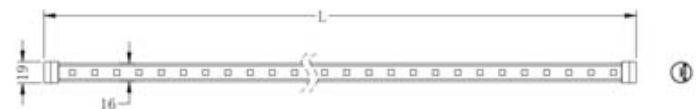

ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-ALF-24-W	SMD LED	Cool White	300lm	120°	24VDC	5W	(L)50x(W)1.6x(H)1.1cm
QS-ALF-24-WW	SMD LED	Warm White	250lm	120°	24VDC	5W	(L)50x(W)1.6x(H)1.1cm
QS-ALF-24-RGB	SMD LED	RGB	/	120°	24VDC	5W	(L)50x(W)1.6x(H)1.1cm
QS-ALF-48-W	SMD LED	Cool White	600lm	120°	24VDC	10W	(L)100x(W)1.6x(H)1.1cm
QS-ALF-48-WW	SMD LED	Warm White	500lm	120°	24VDC	10W	(L)100x(W)1.6x(H)1.1cm
QS-ALF-48-RGB	SMD LED	RGB	/	120°	24VDC	10W	(L)100x(W)1.6x(H)1.1cm
QS-ALR-24-W	SMD LED	Cool White	300lm	120°	24VDC	5W	(L)50x(W)1.6x(H)1.1cm
QS-ALR-24-WW	SMD LED	Warm White	250lm	120°	24VDC	5W	(L)50x(W)1.6x(H)1.1cm
QS-ALR-24-RGB	SMD LED	RGB	/	120°	24VDC	5W	(L)50x(W)1.6x(H)1.1cm
QS-ALR-48-W	SMD LED	Cool White	600lm	120°	24VDC	10W	(L)100x(W)1.6x(H)1.1cm
QS-ALR-48-WW	SMD LED	Warm White	500lm	120°	24VDC	10W	(L)100x(W)1.6x(H)1.1cm
QS-ALR-48-RGB	SMD LED	RGB	/	120°	24VDC	10W	(L)100x(W)1.6x(H)1.1cm



## LED Puck Light

### Features: (特性)


- 1) Long lifetime: >50,000hours  
使用寿命长达50000小时
- 2) Energy conservation: save 80% more energy compared with traditional lighting fixtures  
比传统灯具节电80%以上
- 3) Eco-friendly: no UV or RF interference, no Mercury or Lead  
不产生紫外线, 没有电磁干扰, 不含汞或铅
- 4) Lumen maintenance: 70% at 30,000 hours  
工作30000小时后, 流明保持率为70%
- 5) Surface mounted with screws  
表面安装, 无需开孔, 仅用螺丝固定

### Strong Advantages: (产品优点)


- 1) With built-in constant current LED driver, powered by 12VDC, it is much more stable than that powered by external constant current LED driver.  
内置恒流驱动, 输入12VDC, 比恒流驱动供电更加稳定
- 2) Adopt 1W high lumen CREE LED to guarantee the high brightness and low working temperature  
采用1W高亮度CREE LED, 保证了较高的亮度和较低的工作温度

### Application: (应用范围)


- 1) Cabinet lighting  
橱柜照明
- 2) Display case lighting  
展柜照明
- 3) Boat/car lighting  
游艇, 汽车照明等

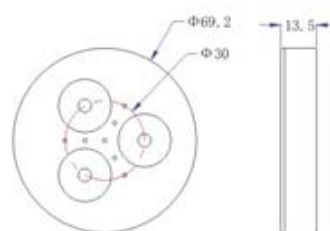


ITEM NUMBER 产品型号	LIGHT SOURCE 光源类型	COLOR 颜色	LUMINOUS FLUX 流明	BEAM ANGLE 发光角度	INPUT VOLTAGE 输入电压	WATTS 功率	DIMENSION 产品尺寸
QS-301-3x1W-W	Edison LED	Cool White	190lm	120°	12VDC	3W	∅ 69.2mmx(H)13.8mm
QS-301-3x1W-WW	Edison LED	Warm White	170lm	120°	12VDC	3W	∅ 69.2mmx(H)13.8mm
QS-301-3xC1W-W	CREE LED	Cool White	255lm	120°	12VDC	3W	∅ 69.2mmx(H)13.8mm
QS-301-3xC1W-WW	CREE LED	Warm White	225lm	120°	12VDC	3W	∅ 69.2mmx(H)13.8mm

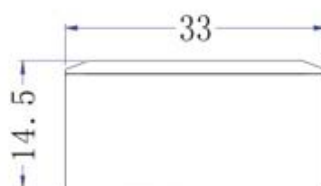


ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-102A-1W-W	Edison LED	Cool White	70lm	120°	12VDC	1W	∅33mmx(H)14.5mm
QS-102A-1W-WW	Edison LED	Warm White	60lm	120°	12VDC	1W	∅33mmx(H)14.5mm
QS-102A-C1W-W	CREE LED	Cool White	120lm	120°	12VDC	1W	∅33mmx(H)14.5mm
QS-102A-C1W-WW	CREE LED	Warm White	85lm	120°	12VDC	1W	∅33mmx(H)14.5mm

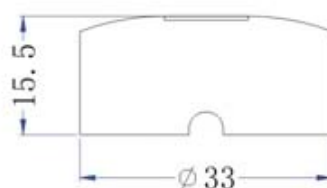

ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-102B-1W-W	Edison LED	Cool White	70lm	60°	12VDC	1W	∅33mmx(H)15.5mm
QS-102B-1W-WW	Edison LED	Warm White	60lm	60°	12VDC	1W	∅33mmx(H)15.5mm
QS-102B-C1W-W	CREE LED	Cool White	120lm	60°	12VDC	1W	∅33mmx(H)15.5mm
QS-102B-C1W-WW	CREE LED	Warm White	85lm	60°	12VDC	1W	∅33mmx(H)15.5mm

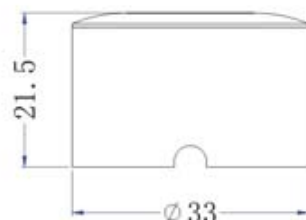

ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-102C-1W-W	Edison LED	Cool White	70lm	30°/60°	12VDC	1W	∅33mmx(H)21.5mm
QS-102C-1W-WW	Edison LED	Warm White	60lm	30°/60°	12VDC	1W	∅33mmx(H)21.5mm
QS-102C-C1W-W	CREE LED	Cool White	120lm	30°/45°	12VDC	1W	∅33mmx(H)21.5mm
QS-102C-C1W-WW	CREE LED	Warm White	85lm	30°/45°	12VDC	1W	∅33mmx(H)21.5mm

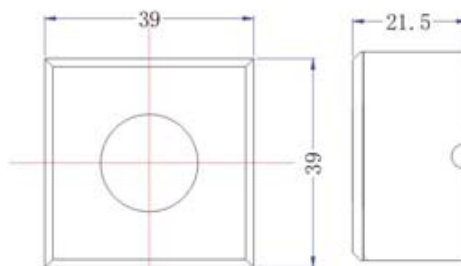

ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-103-1W-W	Edison LED	Cool White	70lm	30°/60°	12VDC	1W	39mmx39mmx(H)21.5mm
QS-103-1W-WW	Edison LED	Warm White	60lm	30°/60°	12VDC	1W	39mmx39mmx(H)21.5mm
QS-103-C1W-W	CREE LED	Cool White	120lm	30°/45°	12VDC	1W	39mmx39mmx(H)21.5mm
QS-103-C1W-WW	CREE LED	Warm White	85lm	30°/45°	12VDC	1W	39mmx39mmx(H)21.5mm



## LED Strip Cabinet Light




### Features: (特性)

- 1) Long working lifetime: more than 50,000 hours  
使用寿命达50,000小时
- 2) Save 80% more energy compared with traditional lighting fixtures  
比传统灯具节电80%以上
- 3) Two Types of operating methods:  
Method 1, powered by 350mA constant current LED driver  
Method 2, With built-in constant current LED driver and powered by 12-24VDC  
两种工作方式：一种是外接恒流驱动。另外一种是在内置恒流驱动, 外接12-24VDC
- 4) Ambient temperature:  $-20^{\circ}\text{C} \sim 50^{\circ}\text{C}$   
工作环境温度:  $-20^{\circ}\text{C} \sim 50^{\circ}\text{C}$
- 5) Neat structure, perfect for cabinet lighting and backlighting  
结构轻薄, 非常适合橱柜和背光照明
- 6) No UV or RF interference, No mercury or Lead  
没有紫外线或电磁干扰, 不含汞或铅

### Application: (应用范围)

- 1) Cabinet lighting  
橱柜照明
- 2) Backlighting  
背光
- 3) Display case lighting  
展柜照明
- 4) Museum and art lighting  
博物馆和艺术品照明

QS-CB-A

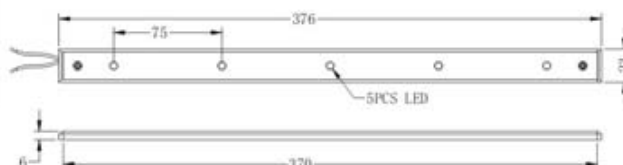

ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-CB-A-5x1W-W	Edison LED	Cool White	350lm	120°	12-24VDC	5W	376mmx23mmx0.6mm
QS-CB-A-5x1W-WW	Edison LED	Warm White	300lm	120°	12-24VDC	5W	376mmx23mmx0.6mm
QS-CB-A-5xC1W-W	CREE LED	Cool White	425lm	120°	12-24VDC	5W	376mmx23mmx0.6mm
QS-CB-A-5xC1W-WW	CREE LED	Warm White	375lm	120°	12-24VDC	5W	376mmx23mmx0.6mm



## LED Strip Cabinet Light




### Features: (特性)

- 1) Long working lifetime: more than 50,000 hours  
使用寿命达50,000小时
- 2) Save 80% more energy compared with traditional lighting fixtures  
比传统灯具节电80%以上
- 3) Input Voltage: 5-50VDC  
输入宽电压5-50VDC
- 4) Ambient temperature: -20°C ~50°C  
工作环境温度: -20°C ~50°C
- 5) With switch on the body of light, ON/HALF ON/OFF  
灯体上带有调光开关
- 6) No UV or RF interference, No mercury or Lead  
没有紫外线或电磁干扰, 不含汞或铅

### Application: (应用范围)

- 1) Cabinet lighting  
橱柜照明
- 2) Backlighting  
背光
- 3) Display case lighting  
展柜照明
- 4) Museum and art lighting  
博物馆和艺术照明

QS-CB-B

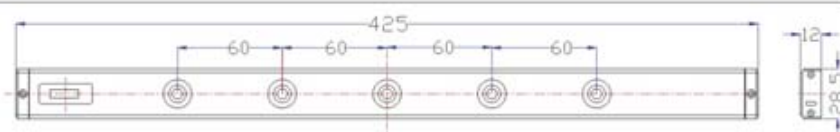

ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-CB-B-5x1W-W	Edison LED	Cool White	350lm	30°	5-50VDC	5W	425mmx28.5mmx12mm
QS-CB-B-5x1W-WW	Edison LED	Warm White	300lm	30°	5-50VDC	5W	425mmx28.5mmx12mm
QS-CB-B-5xC1W-W	CREE LED	Cool White	425lm	30°	5-50VDC	5W	425mmx28.5mmx12mm
QS-CB-B-5xC1W-WW	CREE LED	Warm White	375lm	30°	5-50VDC	5W	425mmx28.5mmx12mm


# LED Bar Light

## Features: (特性)


- 1) 1W high power LED or 3W CREE LED  
采用1W大功率LED或3W CREE LED
- 2) Long working lifetime: more than 50,000hours  
使用寿命长达50,000小时
- 3) Save 80% more energy compared with traditional lighting fixtures  
比传统灯具节电80%以上
- 4) Input wide voltage 12-24VDC  
12-24VDC宽电压输入
- 5) With ON/OFF switch on the body of light  
灯体上有开关按钮
- 6) No UV or RF interference, No mercury or lead  
没有紫外线或电磁干扰, 不含汞或铅

## Application: (应用范围)

- 1) Cabinet lighting  
橱柜照明
- 2) Display case lighting  
展柜照明
- 3) Museum and art lighting  
博物馆和艺术品照明

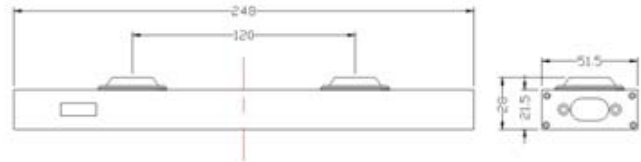

ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-402A-1W-W	Edison LED	Cool White	140lm	30°	12-24VDC	2W	248x51.5x28mm
QS-402A-1W-M	Edison LED	Warm White	120lm	30°	12-24VDC	2W	248x51.5x28mm
QS-402A-C3W-W	CREE LED	Cool White	300lm	30°	12-24VDC	6W	248x51.5x28mm
QS-402A-C3W-M	CREE LED	Warm White	270lm	30°	12-24VDC	6W	248x51.5x28mm

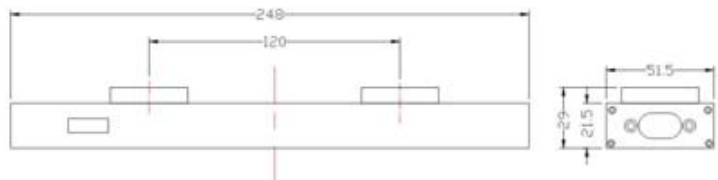

ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-402B-1W-W	Edison LED	Cool White	140lm	120°	12-24VDC	2W	248x51.5x29mm
QS-402B-1W-M	Edison LED	Warm White	120lm	120°	12-24VDC	2W	248x51.5x29mm
QS-402B-C3W-W	CREE LED	Cool White	300lm	120°	12-24VDC	6W	248x51.5x29mm
QS-402B-C3W-M	CREE LED	Warm White	270lm	120°	12-24VDC	6W	248x51.5x29mm




QS-403A




ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-403A-1W-W	Edison LED	Cool White	210lm	30°	12-24VDC	3W	368x51.5x28mm
QS-403A-1W-M	Edison LED	Warm White	180lm	30°	12-24VDC	3W	368x51.5x28mm
QS-403A-C3W-W	CREE LED	Cool White	450lm	30°	12-24VDC	9W	368x51.5x28mm
QS-403A-C3W-M	CREE LED	Warm White	405lm	30°	12-24VDC	9W	368x51.5x28mm

QS-403B




ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-403B-1W-W	Edison LED	Cool White	210lm	120°	12-24VDC	3W	368x51.5x29mm
QS-403B-1W-M	Edison LED	Warm White	180lm	120°	12-24VDC	3W	368x51.5x29mm
QS-403B-C3W-W	CREE LED	Cool White	450lm	120°	12-24VDC	9W	368x51.5x29mm
QS-403B-C3W-M	CREE LED	Warm White	405lm	120°	12-24VDC	9W	368x51.5x29mm

QS-405A

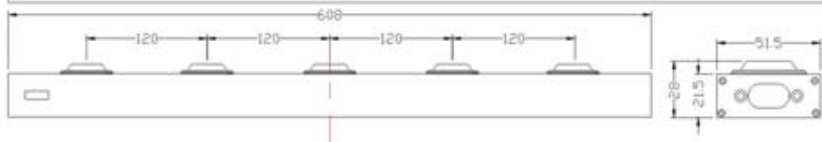

ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-405A-1W-W	Edison LED	Cool White	350lm	30°	12-24VDC	5W	608x51.5x28mm
QS-405A-1W-M	Edison LED	Warm White	300lm	30°	12-24VDC	5W	608x51.5x28mm
QS-405A-C3W-W	CREE LED	Cool White	750lm	30°	12-24VDC	15W	608x51.5x28mm
QS-405A-C3W-M	CREE LED	Warm White	675lm	30°	12-24VDC	15W	608x51.5x28mm

QS-405B

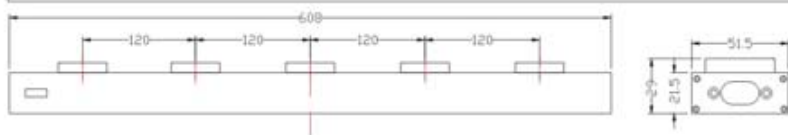

ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-405B-1W-W	Edison LED	Cool White	350lm	120°	12-24VDC	5W	608x51.5x29mm
QS-405B-1W-M	Edison LED	Warm White	300lm	120°	12-24VDC	5W	608x51.5x29mm
QS-405B-C3W-W	CREE LED	Cool White	750lm	120°	12-24VDC	15W	608x51.5x29mm
QS-405B-C3W-M	CREE LED	Warm White	675lm	120°	12-24VDC	15W	608x51.5x29mm



## 3W/6W/9W/15W Round Recessed LED Downlight


### Features: (特性)

- 1) 1W high power LED or 3W CREE LED  
采用1W大功率LED或3W LED
- 2) Save 80% more energy compared with traditional lighting fixtures  
比传统灯具节电80%以上
- 3) Input 12/24VDC. With built-in constant current LED driver, it is much more stable than that powered by constant current LED driver  
输入12/24VDC. 内置恒流驱动, 比外接恒流驱动更稳定
- 4) Easy installation. Recessed mounted by spring  
安装方便. 弹片嵌入式安装
- 5) Dimmer is available. One dimmer can control unlimited lights  
可实现调光功能. 一个调光器可控制无限个灯具
- 6) No UV or RF interference, No mercury or lead  
没有紫外线或电磁干扰, 不含汞或铅
- 7) Long working lifetime: more than 50,000hours  
使用寿命长达50,000小时

### Application: (应用范围)


- 1) Ceiling lighting  
天花照明
- 2) Cabinet lighting  
橱柜照明

QS-302A-3x1W

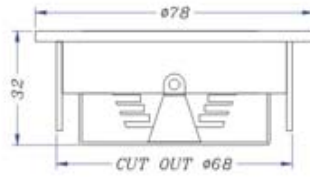


ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-302A-3x1W-W	Edison LED	Cool White	210lm	30°/60°	12VDC	3W	∅ 78mmx(H)32mm	∅ 68mm
QS-302A-3x1W-WW	Edison LED	Warm White	180lm	30°/60°	12VDC	3W	∅ 78mmx(H)32mm	∅ 68mm

QS-302B-3x3W

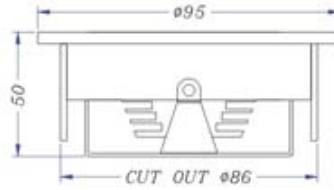


ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-302B-3xC3W-W	CREE LED	Cool White	450lm	30°/45°	12VDC	9W	∅ 95mmx(H)50mm	∅ 86mm
QS-302B-3xC3W-WW	CREE LED	Warm White	405lm	30°/45°	12VDC	9W	∅ 95mmx(H)50mm	∅ 86mm

QS-6x1W

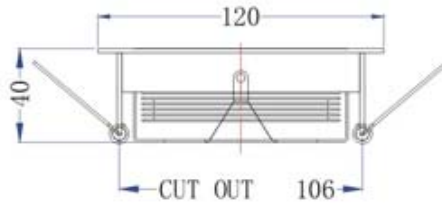

ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-6x1W-W	Edison LED	Cool White	420lm	30°/60°	24VDC	6W	∅ 120mmx(H)40mm	∅ 106mm
QS-6x1W-WW	Edison LED	Cool White	360lm	30°/60°	24VDC	6W	∅ 120mmx(H)40mm	∅ 106mm
QS-6xC1W-W	CREE LED	Warm White	510lm	30°/45°	24VDC	6W	∅ 120mmx(H)40mm	∅ 106mm
QS-6xC1W-WW	CREE LED	Warm White	450lm	30°/45°	24VDC	6W	∅ 120mmx(H)40mm	∅ 106mm

QS-15x1W

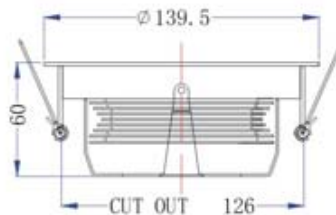

ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-15x1W-W	Edison LED	Cool White	1050lm	30°/60°	24VDC	15W	∅ 139.5mmx(H)60mm	∅ 126mm
QS-15x1W-WW	Edison LED	Warm White	900lm	30°/60°	24VDC	15W	∅ 139.5mmx(H)60mm	∅ 126mm
QS-15xC1W-W	CREE LED	Cool White	1275lm	30°/45°	24VDC	15W	∅ 139.5mmx(H)60mm	∅ 126mm
QS-15xC1W-WW	CREE LED	Warm White	1125lm	30°/45°	24VDC	15W	∅ 139.5mmx(H)60mm	∅ 126mm




## 1W/3W Round Recessed LED Downlight

### Features: (特性)


- 1) 1W high power LED or 3W CREE LED  
采用1W大功率LED或3W CREE LED
- 2) Save 80% more energy compared with traditional lighting fixtures  
比传统灯具节电80%以上
- 3) Input 12VDC. With built-in constant current LED driver, it is much more stable than that powered by constant current LED driver  
输入12VDC. 内置恒流驱动. 比外接恒流驱动更稳定
- 4) Easy installation. Recessed mounted by spring  
安装方便. 弹片嵌入式安装
- 5) Dimmer is available. One dimmer can control unlimited lighting fixtures  
可实现调光功能. 一个调光器可以控制无限个灯具
- 6) No UV or RF interference, No mercury or lead  
没有紫外线或电磁干扰. 不含汞或铅
- 7) Long working lifetime: more than 50,000hours  
使用寿命长达50,000小时

### Application: (应用范围)


- 1) Cabinet lighting  
橱柜照明
- 2) Furniture lighting  
家具照明
- 3) Elevator lighting  
电梯照明
- 4) Ceiling lighting  
天花照明
- 5) Show case lighting  
展柜照明
- 6) Museum and art lighting  
博物馆和艺术品照明
- 7) Boat and car lighting  
船舶. 汽车照明




ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-101A-1W-W	Edison LED	Cool White	70lm	120°	12VDC	1W	∅ 41.5mmx(H)25mm	∅ 35mm
QS-101A-1W-WW	Edison LED	Warm White	60lm	120°	12VDC	1W	∅ 41.5mmx(H)25mm	∅ 35mm
QS-101A-C3W-W	CREE LED	Cool White	150lm	120°	12VDC	3W	∅ 41.5mmx(H)25mm	∅ 35mm
QS-101A-C3W-WW	CREE LED	Warm White	135lm	120°	12VDC	3W	∅ 41.5mmx(H)25mm	∅ 35mm




ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-101B-1W-W	Edison LED	Cool White	70lm	30°/60°	12VDC	1W	∅ 41.5mmx(H)36.2mm	∅ 35mm
QS-101B-1W-WW	Edison LED	Warm White	60lm	30°/60°	12VDC	1W	∅ 41.5mmx(H)36.2mm	∅ 35mm
QS-101B-C3W-W	CREE LED	Cool White	150lm	30°/45°	12VDC	3W	∅ 41.5mmx(H)36.2mm	∅ 35mm
QS-101B-C3W-WW	CREE LED	Warm White	135lm	30°/45°	12VDC	3W	∅ 41.5mmx(H)36.2mm	∅ 35mm

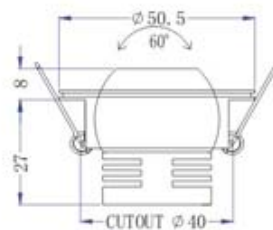


ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-101C-1W-W	Edison LED	Cool White	70lm	30°/60°	12VDC	1W	∅ 50.5mmx(H)35mm	∅ 40mm
QS-101C-1W-WW	Edison LED	Warm White	60lm	30°/60°	12VDC	1W	∅ 50.5mmx(H)35mm	∅ 40mm
QS-101C-C3W-W	CREE LED	Cool White	150lm	30°/45°	12VDC	3W	∅ 50.5mmx(H)35mm	∅ 40mm
QS-101C-C3W-WW	CREE LED	Warm White	135lm	30°/45°	12VDC	3W	∅ 50.5mmx(H)35mm	∅ 40mm

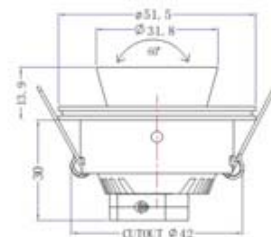


ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-104A-1W-W	Edison LED	Cool White	70lm	80°	12VDC	1W	∅ 51.5mmx(H)43.9mm	∅ 42mm
QS-104A-1W-WW	Edison LED	Warm White	60lm	80°	12VDC	1W	∅ 51.5mmx(H)43.9mm	∅ 42mm
QS-104A-C3W-W	CREE LED	Cool White	150lm	80°	12VDC	3W	∅ 51.5mmx(H)43.9mm	∅ 42mm
QS-104A-C3W-WW	CREE LED	Warm White	135lm	80°	12VDC	3W	∅ 51.5mmx(H)43.9mm	∅ 42mm

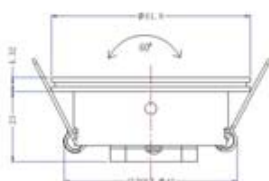

ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-104B-1W-W	Edison LED	Cool White	70lm	120°	12VDC	1W	∅ 61.8mmx(H)27.32mm	∅ 42mm
QS-104B-1W-WW	Edison LED	Warm White	60lm	120°	12VDC	1W	∅ 61.8mmx(H)27.32mm	∅ 42mm
QS-104B-C3W-W	CREE LED	Cool White	150lm	120°	12VDC	3W	∅ 61.8mmx(H)27.32mm	∅ 42mm
QS-104B-C3W-WW	CREE LED	Warm White	135lm	120°	12VDC	3W	∅ 61.8mmx(H)27.32mm	∅ 42mm

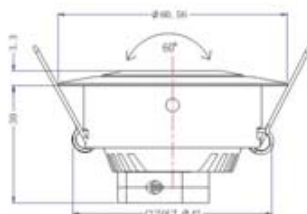

ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-105A-1W-W	Edison LED	Cool White	70lm	30°/60°	12VDC	1W	∅ 60.56mmx(H)33.3mm	∅ 42mm
QS-105A-1W-WW	Edison LED	Warm White	60lm	30°/60°	12VDC	1W	∅ 60.56mmx(H)33.3mm	∅ 42mm
QS-105A-C3W-W	CREE LED	Cool White	150lm	30°/45°	12VDC	3W	∅ 60.56mmx(H)33.3mm	∅ 42mm
QS-105A-C3W-WW	CREE LED	Warm White	135lm	30°/45°	12VDC	3W	∅ 60.56mmx(H)33.3mm	∅ 42mm



ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-106-1W-W	Edison LED	Cool White	70lm	30°/60°	12VDC	1W	∅ 50.58mmx(H)54.93mm	∅ 32mm
QS-106-1W-WW	Edison LED	Warm White	60lm	30°/60°	12VDC	1W	∅ 50.58mmx(H)54.93mm	∅ 32mm
QS-106-C3W-W	CREE LED	Cool White	150lm	30°/45°	12VDC	3W	∅ 50.58mmx(H)54.93mm	∅ 32mm
QS-106-C3W-WW	CREE LED	Warm White	135lm	30°/45°	12VDC	3W	∅ 50.58mmx(H)54.93mm	∅ 32mm




## Rectangular Recessed LED Downlight

### Features: (特性)

- 1) 1W high power LED or 3W CREE LED  
采用1W大功率LED或3W CREE LED
- 2) Save 80% more energy compared with traditional lighting fixtures  
比传统灯具节电80%以上
- 3) Input 12VDC. With built-in constant current LED driver, it is much more stable than that powered by 350mA constant current LED driver  
输入12VDC. 内置恒流驱动, 比外接恒流驱动更稳定
- 4) Easy installation. Recessed mounted by spring  
安装方便. 弹片嵌入式安装
- 5) Dimmer is available  
可实现调光功能
- 6) No UV or RF interference, No mercury or lead  
没有紫外线或电磁干扰, 不含汞或铅
- 7) Long working lifetime: more than 50,000hours  
使用寿命长达50,000小时


### Application: (应用范围)

- 1) Cabinet lighting  
橱柜照明
- 2) Furniture lighting  
家具照明
- 3) Elevator lighting  
电梯照明
- 4) Ceiling lighting  
天花照明
- 5) Show case lighting  
展柜照明
- 6) Museum and art lighting  
博物馆和艺术品照明
- 7) Boat and car lighting  
船舶, 汽车照明
- 8) Warehouse lighting  
仓库照明

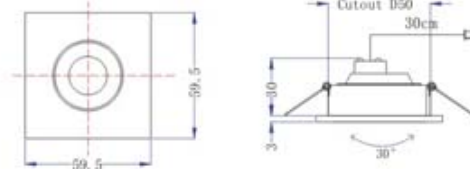


ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-201-1W-W	Edison LED	Cool White	70lm	30°/60°	12VDC	1W	59.5mmx59.5mm(H)30mm	∅50mm
QS-201-1W-WW	Edison LED	Warm White	60lm	30°/60°	12VDC	1W	59.5mmx59.5mm(H)30mm	∅50mm
QS-201-C3W-W	CREE LED	Cool White	150lm	30°/45°	12VDC	3W	59.5mmx59.5mm(H)30mm	∅50mm
QS-201-C3W-WW	CREE LED	Warm White	135lm	30°/45°	12VDC	3W	59.5mmx59.5mm(H)30mm	∅50mm

### QS-202

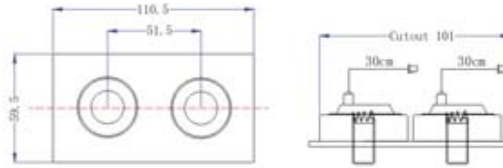


ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-202-1W-W	Edison LED	Cool White	140lm	30°/60°	12VDC	2W	110.5mmx59.5mm(H)30mm	101x50mm
QS-202-1W-WW	Edison LED	Warm White	120lm	30°/60°	12VDC	2W	110.5mmx59.5mm(H)30mm	101x50mm
QS-202-C3W-W	CREE LED	Cool White	300lm	30°/45°	12VDC	6W	110.5mmx59.5mm(H)30mm	101x50mm
QS-202-C3W-WW	CREE LED	Warm White	270lm	30°/45°	12VDC	6W	110.5mmx59.5mm(H)30mm	101x50mm

### QS-203

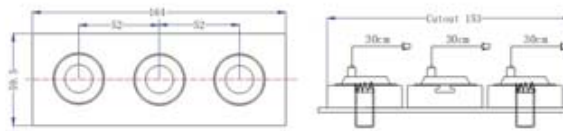


ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-203-1W-W	Edison LED	Cool White	210lm	30°/60°	12VDC	3W	164mmx59.5mm(H)30mm	153x50mm
QS-203-1W-WW	Edison LED	Warm White	180lm	30°/60°	12VDC	3W	164mmx59.5mm(H)30mm	153x50mm
QS-203-C3W-W	CREE LED	Cool White	450lm	30°/45°	12VDC	9W	164mmx59.5mm(H)30mm	153x50mm
QS-203-C3W-WW	CREE LED	Warm White	405lm	30°/45°	12VDC	9W	164mmx59.5mm(H)30mm	153x50mm

### QS-204

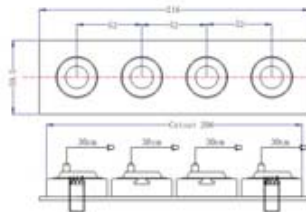



ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-204-1W-W	Edison LED	Cool White	280lm	30°/60°	12VDC	4W	216mmx59.5mm(H)30mm	206x50mm
QS-204-1W-WW	Edison LED	Warm White	240lm	30°/60°	12VDC	4W	216mmx59.5mm(H)30mm	206x50mm
QS-204-C3W-W	CREE LED	Cool White	600lm	30°/45°	12VDC	12W	216mmx59.5mm(H)30mm	206x50mm
QS-204-C3W-WW	CREE LED	Warm White	540lm	30°/45°	12VDC	12W	216mmx59.5mm(H)30mm	206x50mm

### QS-204R


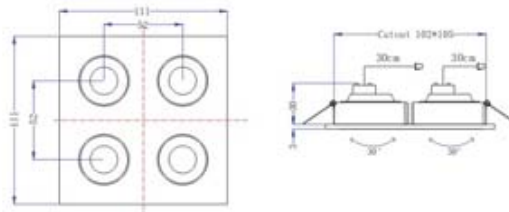


ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-204R-1W-W	Edison LED	Cool White	280lm	30°/60°	12VDC	4W	111mmx111mm(H)30mm	105x102mm
QS-204R-1W-WW	Edison LED	Warm White	240lm	30°/60°	12VDC	4W	111mmx111mm(H)30mm	105x102mm
QS-204R-C3W-W	CREE LED	Cool White	600lm	30°/45°	12VDC	12W	111mmx111mm(H)30mm	105x102mm
QS-204R-C3W-WW	CREE LED	Warm White	540lm	30°/45°	12VDC	12W	111mmx111mm(H)30mm	105x102mm









ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-501-1W-W	Edison LED	Cool White	210lm	30°/60°	12/24VDC	3W	93mmx93mm(H)43.5mm	∅ 80mm
QS-501-1W-WW	Edison LED	Warm White	180lm	30°/60°	12/24VDC	3W	93mmx93mm(H)43.5mm	∅ 80mm
QS-501-C1W-W	CREE LED	CREE LED	255lm	30°/45°	12/24VDC	3W	93mmx93mm(H)43.5mm	∅ 80mm
QS-501-C1W-WW	CREE LED	CREE LED	225lm	30°/45°	12/24VDC	3W	93mmx93mm(H)43.5mm	∅ 80mm

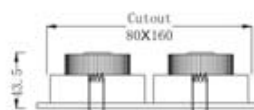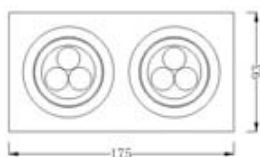


ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-502-1W-W	Edison LED	Cool White	420lm	30°/60°	12/24VDC	6W	175mmx93mm(H)43.5mm	80x160mm
QS-502-1W-WW	Edison LED	Warm White	360lm	30°/60°	12/24VDC	6W	175mmx93mm(H)43.5mm	80x160mm
QS-502-C1W-W	CREE LED	Cool White	510lm	30°/45°	12/24VDC	6W	175mmx93mm(H)43.5mm	80x160mm
QS-502-C1W-WW	CREE LED	Warm White	450lm	30°/45°	12/24VDC	6W	175mmx93mm(H)43.5mm	80x160mm




ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-503-1W-W	Edison LED	Cool White	630lm	30°/60°	12/24VDC	9W	260mmx93mm(H)43.5mm	80x245mm
QS-503-1W-WW	Edison LED	Warm White	540lm	30°/60°	12/24VDC	9W	260mmx93mm(H)43.5mm	80x245mm
QS-503-C1W-W	CREE LED	Cool White	765lm	30°/45°	12/24VDC	9W	260mmx93mm(H)43.5mm	80x245mm
QS-503-C1W-WW	CREE LED	Warm White	675lm	30°/45°	12/24VDC	9W	260mmx93mm(H)43.5mm	80x245mm




ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-504R-1W-W	Edison LED	Cool White	840lm	30°/60°	12/24VDC	12W	175mmx175mm(H)43.5mm	160x160mm
QS-504R-1W-WW	Edison LED	Warm White	720lm	30°/60°	12/24VDC	12W	175mmx175mm(H)43.5mm	160x160mm
QS-504R-C1W-W	CREE LED	Cool White	1020lm	30°/45°	12/24VDC	12W	175mmx175mm(H)43.5mm	160x160mm
QS-504R-C1W-WW	CREE LED	Warm White	900lm	30°/45°	12/24VDC	12W	175mmx175mm(H)43.5mm	160x160mm

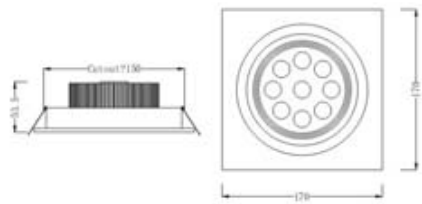


ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-601-1W-W	Edison LED	Cool White	630lm	30°/60°	12/24VDC	9W	170mmx170mm(H)53.5mm	150mm
QS-601-1W-WW	Edison LED	Warm White	540lm	30°/60°	12/24VDC	9W	170mmx170mm(H)53.5mm	150mm
QS-601-C1W-W	CREE LED	Cool White	765lm	30°/45°	12/24VDC	9W	170mmx170mm(H)53.5mm	150mm
QS-601-C1W-WW	CREE LED	Warm White	675lm	30°/45°	12/24VDC	9W	170mmx170mm(H)53.5mm	150mm

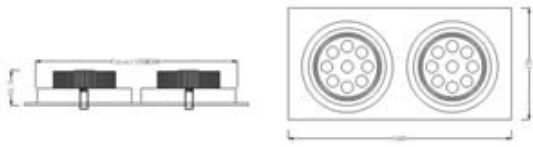

ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-602-1W-W	Edison LED	Cool White	1260lm	30°/60°	12/24VDC	18W	340mmx170mm(H)53.5mm	150x308mm
QS-602-1W-WW	Edison LED	Warm White	1080lm	30°/60°	12/24VDC	18W	340mmx170mm(H)53.5mm	150x308mm
QS-602-C1W-W	CREE LED	Cool White	1530lm	30°/45°	12/24VDC	18W	340mmx170mm(H)53.5mm	150x308mm
QS-602-C1W-WW	CREE LED	Warm White	1350lm	30°/45°	12/24VDC	18W	340mmx170mm(H)53.5mm	150x308mm

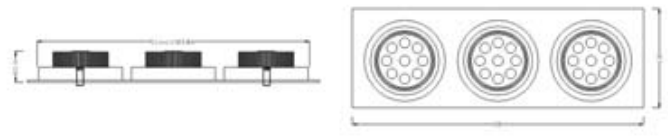

ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-603-1W-W	Edison LED	Cool White	1890lm	30°/60°	12/24VDC	27W	500mmx170mm(H)53.5mm	150x468mm
QS-603-1W-WW	Edison LED	Warm White	1620lm	30°/60°	12/24VDC	27W	500mmx170mm(H)53.5mm	150x468mm
QS-603-C1W-W	CREE LED	Cool White	2295lm	30°/45°	12/24VDC	27W	500mmx170mm(H)53.5mm	150x468mm
QS-603-C1W-WW	CREE LED	Warm White	2025lm	30°/45°	12/24VDC	27W	500mmx170mm(H)53.5mm	150x468mm

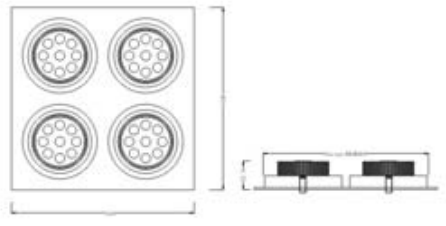


ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION	CUTOUT SIZE
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸	开孔尺寸
QS-604-1W-W	Edison LED	Cool White	2520lm	30°/60°	12/24VDC	36W	340mmx340mm(H)53.5mm	308x308mm
QS-604-1W-WW	Edison LED	Warm White	2160lm	30°/60°	12/24VDC	36W	340mmx340mm(H)53.5mm	308x308mm
QS-604-C1W-W	CREE LED	Cool White	3060lm	30°/45°	12/24VDC	36W	340mmx340mm(H)53.5mm	308x308mm
QS-604-C1W-WW	CREE LED	Warm White	2700lm	30°/45°	12/24VDC	36W	340mmx340mm(H)53.5mm	308x308mm


# 3x1W LED Spot Light

## Features: (特性)


- 1) Long working lifetime: more than 50,000 hours  
使用寿命长达50,000小时
- 2) Socket: MR16, GU10, E27  
MR16, GU10和E27底座
- 3) Excellent heat dissipation  
散热效果优异
- 4) No UV or RF interference, no Mercury or Lead  
没有紫外线或电磁干扰, 不含汞或铅

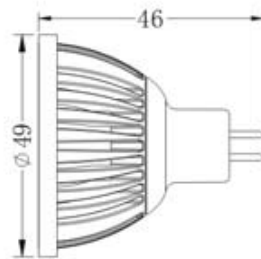

ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-MR16-3x1W-W	Edison LED	Cool White	210lm	30°/60°	12VDC	3W	∅49mmx46mm
QS-MR16-3x1W-WW	Edison LED	Warm White	180lm	30°/60°	12VDC	3W	∅49mmx46mm
QS-MR16-3xC1W-W	CREE LED	Cool White	255lm	30°/45°	12VDC	3W	∅49mmx46mm
QS-MR16-3xC1W-WW	CREE LED	Warm White	225lm	30°/45°	12VDC	3W	∅49mmx46mm

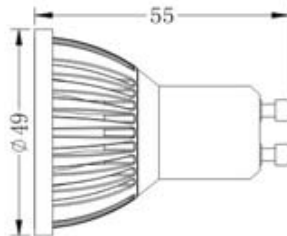

ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-GU10-3x1W-W	Edison LED	Cool White	210lm	30°/60°	85-265VAC	3W	∅49mmx55mm
QS-GU10-3x1W-WW	Edison LED	Warm White	180lm	30°/60°	85-265VAC	3W	∅49mmx55mm
QS-GU10-3xC1W-W	CREE LED	Cool White	255lm	30°/45°	85-265VAC	3W	∅49mmx55mm
QS-GU10-3xC1W-WW	CREE LED	Warm White	225lm	30°/45°	85-265VAC	3W	∅49mmx55mm

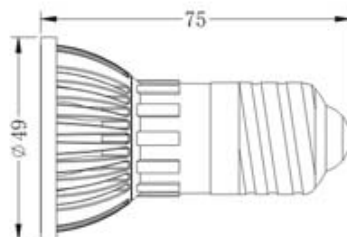


ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-E27-3x1W-W	Edison LED	Cool White	210lm	30°/60°	85-265VAC	3W	∅49mmx75mm
QS-E27-3x1W-WW	Edison LED	Warm White	180lm	30°/60°	85-265VAC	3W	∅49mmx75mm
QS-E27-3xC1W-W	CREE LED	Cool White	255lm	30°/45°	85-265VAC	3W	∅49mmx75mm
QS-E27-3xC1W-WW	CREE LED	Warm White	225lm	30°/45°	85-265VAC	3W	∅49mmx75mm


# 1x3W LED Spot Light

## Features: (特性)


- 1) Long working lifetime: more than 50,000 hours  
使用寿命长达50,000小时
- 2) Socket: MR16, GU10, E27  
MR16, GU10和E27底座
- 3) Excellent heat dissipation  
散热效果优异
- 4) No UV or RF interference, no Mercury or Lead  
没有紫外线或电磁干扰, 不含汞或铅

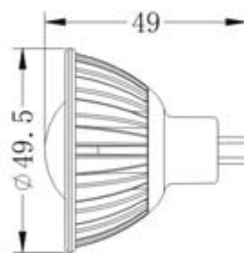

ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-MR16-C3W-W	CREE LED	Cool White	150lm	50°/70°/100°	12VDC	3W	∅49.5mmx49mm
QS-MR16-C3W-WW	CREE LED	Warm White	135lm	50°/70°/100°	12VDC	3W	∅49.5mmx49mm

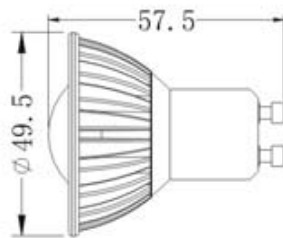

ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-GU10-C3W-W	CREE LED	Cool White	150lm	50°/70°/100°	85~265VAC	3W	∅49.5mmx57.5mm
QS-GU10-C3W-WW	CREE LED	Warm White	135lm	50°/70°/100°	85~265VAC	3W	∅49.5mmx57.5mm

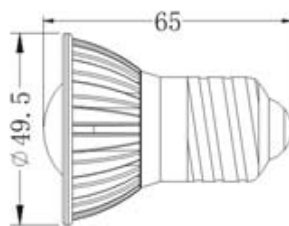


ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-E27-C3W-W	CREE LED	Cool White	150lm	50°/70°/100°	85~265VAC	3W	∅49.5mmx65mm
QS-E27-C3W-WW	CREE LED	Warm White	135lm	50°/70°/100°	85~265VAC	3W	∅49.5mmx65mm

## PAR30 7x1W LED Spot Light

### Features: (特性)

- 1) Socket type: E27  
E27底座
- 2) Unique structure for excellent heat dissipation  
独特的结构设计,散热效果优异
- 3) Long working lifetime: more than 50,000 hours  
使用寿命长达50,000小时
- 4) No UV or RF interference, no Mercury or Lead  
没有紫外线或电磁干扰, 不含汞或铅

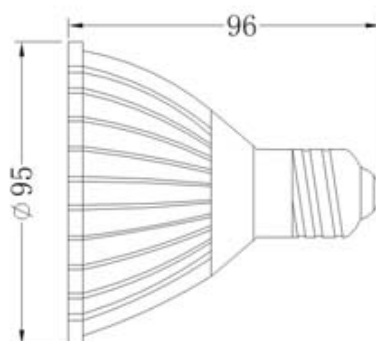


ITEM NUMBER 产品型号	LIGHT SOURCE 光源类型	COLOR 颜色	LUMINOUS FLUX 流明	BEAM ANGLE 发光角度	INPUT VOLTAGE 输入电压	WATTS 功率	DIMENSION 产品尺寸
QS-PAR30-7x1W-W	Edison LED	Cool White	490lm	30°/60°	85-265VAC	7W	∅ 95mmx96mm
QS-PAR30-7x1W-WW	Edison LED	Warm White	420lm	30°/60°	85-265VAC	7W	∅ 95mmx96mm
QS-PAR30-7xC1W-W	CREE LED	Cool White	595lm	30°/45°	85-265VAC	7W	∅ 95mmx96mm
QS-PAR30-7xC1W-WW	CREE LED	Warm White	525lm	30°/45°	85-265VAC	7W	∅ 95mmx96mm

## PAR38 12x1W LED Spot Light

### Features: (特性)

- 1) Socket type: E27  
E27底座
- 2) Unique structure for excellent heat dissipation  
独特的结构设计,散热效果优异
- 3) Long working lifetime: more than 50,000 hours  
使用寿命长达50,000小时
- 4) No UV or RF interference, no Mercury or Lead  
没有紫外线或电磁干扰, 不含汞或铅

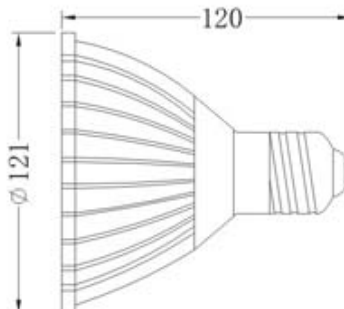


ITEM NUMBER 产品型号	LIGHT SOURCE 光源类型	COLOR 颜色	LUMINOUS FLUX 流明	BEAM ANGLE 发光角度	INPUT VOLTAGE 输入电压	WATTS 功率	DIMENSION 产品尺寸
QS-PAR38-12x1W-W	Edison LED	Cool White	840lm	30°/60°	85-265VAC	12W	∅ 121mmx120mm
QS-PAR38-12x1W-WW	Edison LED	Warm White	720lm	30°/60°	85-265VAC	12W	∅ 121mmx120mm
QS-PAR38-12xC1W-W	CREE LED	Cool White	1020lm	30°/45°	85-265VAC	12W	∅ 121mmx120mm
QS-PAR38-12xC1W-WW	CREE LED	Warm White	900lm	30°/45°	85-265VAC	12W	∅ 121mmx120mm


# Global LED Spot Light

## Features: (特性)


- 1) Wide beam angle, 120°  
发光角度120°
- 2) Socket type: E27  
E27底座
- 3) Smart global shape  
外形美观
- 4) Excellent heat dissipation  
散热性能优异
- 5) Long working lifetime: more than 50,000 hours  
使用寿命长达50,000小时

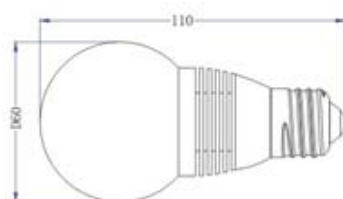

ITEM NUMBER 产品型号	LIGHT SOURCE 光源类型	COLOR 颜色	LUMINOUS FLUX 流明	BEAM ANGLE 发光角度	INPUT VOLTAGE 输入电压	WATTS 功率	DIMENSION 产品尺寸
QS-G-E27-3x1W-W	OSRAM LED	Cool White	360lm	120°	85-265VAC	3W	∅ 60mmx110mm
QS-G-E27-3x1W-WW	OSRAM LED	Warm White	300lm	120°	85-265VAC	3W	∅ 60mmx110mm

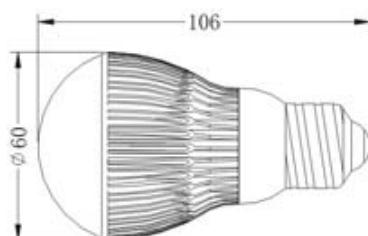

ITEM NUMBER 产品型号	LIGHT SOURCE 光源类型	COLOR 颜色	LUMINOUS FLUX 流明	BEAM ANGLE 发光角度	INPUT VOLTAGE 输入电压	WATTS 功率	DIMENSION 产品尺寸
QS-G-E27-5x1W-W	Edison LED	Cool White	350lm	120°	85-265VAC	5W	∅ 60mmx106mm
QS-G-E27-5x1W-WW	Edison LED	Warm White	300lm	120°	85-265VAC	5W	∅ 60mmx106mm
QS-G-E27-5xC1W-W	CREE LED	Cool White	425lm	120°	85-265VAC	5W	∅ 60mmx106mm
QS-G-E27-5xC1W-WW	CREE LED	Warm White	375lm	120°	85-265VAC	5W	∅ 60mmx106mm

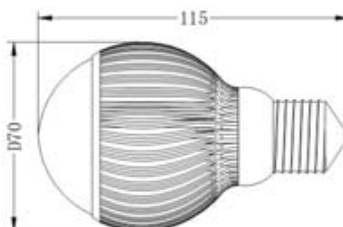


ITEM NUMBER 产品型号	LIGHT SOURCE 光源类型	COLOR 颜色	LUMINOUS FLUX 流明	BEAM ANGLE 发光角度	INPUT VOLTAGE 输入电压	WATTS 功率	DIMENSION 产品尺寸
QS-G-E27-6x1W-W	Edison LED	Cool White	420lm	120°	85-265VAC	6W	∅ 70mmx115mm
QS-G-E27-6x1W-WW	Edison LED	Warm White	360lm	120°	85-265VAC	6W	∅ 70mmx115mm
QS-G-E27-6xC1W-W	CREE LED	Cool White	510lm	120°	85-265VAC	6W	∅ 70mmx115mm
QS-G-E27-6xC1W-WW	CREE LED	Warm White	450lm	120°	85-265VAC	6W	∅ 70mmx115mm

# CREE 10W LED Spot Light

## Features: (特性)

- 1) Socket type: E27  
E27底座
- 2) Long working lifetime: more than 50,000 hours  
使用寿命长达50,000小时
- 3) No UV or RF interference, no Mercury or Lead  
没有紫外线或电磁干扰, 不含汞或铅

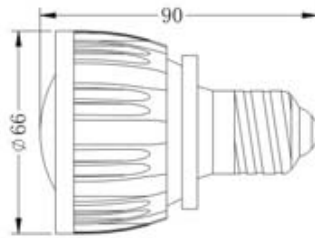


ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-E27-10W-W	CREE LED	Cool White	560lm	50°/70°/100°	85~265VAC	10W	φ66mmx90mm
QS-E27-10W-WW	CREE LED	Warm White	420lm	50°/70°/100°	85~265VAC	10W	φ66mmx90mm

# MR11 LED Spot Light

## Features: (特性)

- 1) Socket type: MR11  
MR11底座
- 2) Long working lifetime: more than 50,000 hours  
使用寿命长达50,000小时
- 3) No UV or RF interference, no Mercury or Lead  
没有紫外线或电磁干扰, 不含汞或铅

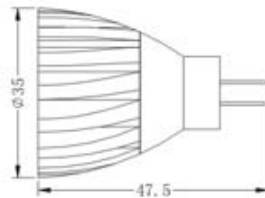

ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-MR11-1W-W	Edison LED	Cool White	70lm	30°/60°	12VDC	1W	φ35mmx47.5mm
QS-MR11-1W-WW	Edison LED	Warm white	60lm	30°/60°	12VDC	1W	φ35mmx47.5mm
QS-MR11-C1W-W	CREE LED	Cool White	85lm	30°/45°	12VDC	1W	φ35mmx47.5mm
QS-MR11-C1W-WW	CREE LED	Warm White	75lm	30°/45°	12VDC	1W	φ35mmx47.5mm
QS-MR11-C2W-W	CREE LED	Cool White	120lm	30°/45°	12VDC	2W	φ35mmx47.5mm
QS-MR11-C2W-WW	CREE LED	Warm White	100lm	30°/45°	12VDC	2W	φ35mmx47.5mm




## LED Panel Light




### Features: (特性)

- |   |  |
|---|--|
| <ul style="list-style-type: none"> <li>1) Save 70%-90% more energy compared with traditional lighting fixtures<br/>比传统灯具节电70%-90%</li> <li>2) Dimmable. One dimmer can control unlimited panel lights<br/>可调光. 一个调光器可控制无限个面板灯</li> <li>3) The light is bright but soft<br/>灯光亮度高. 光线柔和</li> <li>4) Recessed mounted or work as a pendant. 24VDC version can be surface mounted with screws<br/>嵌入式或悬吊式安装. 如果选择24V输入, 可表面安装</li> </ul> | <ul style="list-style-type: none"> <li>1) Commercial lighting<br/>商业照明</li> <li>2) Office lighting<br/>办公照明</li> <li>3) Residential lighting<br/>居家照明</li> <li>4) Warehouse lighting<br/>仓库照明</li> </ul> |
|---|--|


QS-PL600x600



QS-PL300x600

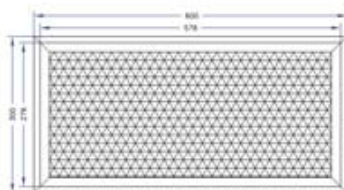

QS-PL300x300



ITEM NUMBER 产品型号	LIGHT SOURCE 光源类型	COLOR 颜色	LUMINOUS FLUX 流明	BEAM ANGLE 发光角度	INPUT VOLTAGE 输入电压	WATTS 功率	DIMENSION 产品尺寸
QS-PL300x300-W	SMD LED	Cool White	1100lm	120°	100V-240VAC	14W	(L)300x(W)300mm
QS-PL300x300-WW	SMD LED	Warm White	900lm	120°	100V-240VAC	14W	(L)300x(W)300mm
QS-PL600x300-W	SMD LED	Cool White	2200lm	120°	100V-240VAC	28W	(L)600x(W)300mm
QS-PL600x300-WW	SMD LED	Warm White	1800lm	120°	100V-240VAC	28W	(L)600x(W)300mm
QS-PL600x600-W	SMD LED	Cool White	4500lm	120°	100V-240VAC	56W	(L)600x(W)600mm
QS-PL600x600-WW	SMD LED	Warm White	3600lm	120°	100V-240VAC	56W	(L)600x(W)600mm





## Aluminum LED Strip Light


### Features: (特性)

- 1) Long working lifetime: more than 50,000 hours  
使用寿命长达50,000小时以上
- 2) No UV or RF interference, no Mercury or Lead  
没有紫外线或电磁干扰, 不含汞或铅
- 3) Protection class: waterproof, IP65  
保护等级: IP65
- 4) Ambient temperature: -20~50°C  
工作环境温度: -20~50°C
- 5) Smart appearance  
外观精美
- 6) The light is soft  
光线柔和

### Application: (应用范围)

- 1) Cabinet lighting  
橱柜照明
- 2) Display case lighting  
展柜照明
- 3) Decoration lighting  
装饰照明

QS-AL-27

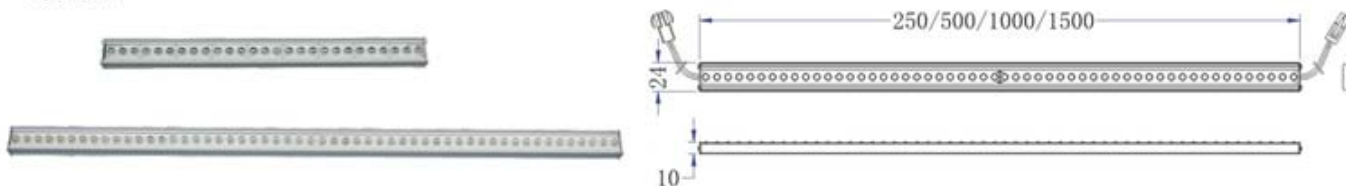

ITEM NUMBER 产品型号	LIGHT SOURCE 光源类型	COLOR 颜色	LUMINOUS FLUX 流明	BEAM ANGLE 发光角度	INPUT VOLTAGE 输入电压	WATTS 功率	DIMENSION 产品尺寸
QS-AL-27-W	27 pcs $\varnothing$ 5mm LED	Cool White	130lm	120°	12/24VDC	2.1W	(L)25x(W)2.4x(H)1.0cm
QS-AL-27-WW	27 pcs $\varnothing$ 5mm LED	Warm White	100lm	120°	12/24VDC	2.1W	(L)25x(W)2.4x(H)1.0cm
QS-AL-27-R	27 pcs $\varnothing$ 5mm LED	Red	/	120°	12/24VDC	2.1W	(L)25x(W)2.4x(H)1.0cm
QS-AL-27-G	27 pcs $\varnothing$ 5mm LED	Green	/	120°	12/24VDC	2.1W	(L)25x(W)2.4x(H)1.0cm
QS-AL-27-B	27 pcs $\varnothing$ 5mm LED	Blue	/	120°	12/24VDC	2.1W	(L)25x(W)2.4x(H)1.0cm
QS-AL-36-RGB	36 pcs $\varnothing$ 5mm LED	RGB	/	120°	12/24VDC	2.8W	(L)25x(W)2.4x(H)1.0cm
QS-AL-54-W	54 pcs $\varnothing$ 5mm LED	Cool White	260lm	120°	12/24VDC	4.2W	(L)50x(W)2.4x(H)1.0cm
QS-AL-54-WW	54 pcs $\varnothing$ 5mm LED	Warm White	200lm	120°	12/24VDC	4.2W	(L)50x(W)2.4x(H)1.0cm
QS-AL-54-R	54 pcs $\varnothing$ 5mm LED	Red	/	120°	12/24VDC	4.2W	(L)50x(W)2.4x(H)1.0cm
QS-AL-54-G	54 pcs $\varnothing$ 5mm LED	Green	/	120°	12/24VDC	4.2W	(L)50x(W)2.4x(H)1.0cm
QS-AL-54-B	54 pcs $\varnothing$ 5mm LED	Blue	/	120°	12/24VDC	4.2W	(L)50x(W)2.4x(H)1.0cm
QS-AL-72-RGB	72 pcs $\varnothing$ 5mm LED	RGB	/	120°	12/24VDC	5.6W	(L)50x(W)2.4x(H)1.0cm
QS-AL-108-W	108 pcs $\varnothing$ 5mm LED	Cool White	520lm	120°	12/24VDC	8.4W	(L)100x(W)2.4x(H)1.0cm
QS-AL-108-WW	108 pcs $\varnothing$ 5mm LED	Warm White	400lm	120°	12/24VDC	8.4W	(L)100x(W)2.4x(H)1.0cm
QS-AL-108-R	108 pcs $\varnothing$ 5mm LED	Red	/	120°	12/24VDC	8.4W	(L)100x(W)2.4x(H)1.0cm
QS-AL-108-G	108 pcs $\varnothing$ 5mm LED	Green	/	120°	12/24VDC	8.4W	(L)100x(W)2.4x(H)1.0cm
QS-AL-108-B	108 pcs $\varnothing$ 5mm LED	Blue	/	120°	12/24VDC	8.4W	(L)100x(W)2.4x(H)1.0cm
QS-AL-144-RGB	144 pcs $\varnothing$ 5mm LED	RGB	/	120°	12/24VDC	11.2W	(L)100x(W)2.4x(H)1.0cm



## IP68 LED Strip Light

### Features: (特性)

- 1) Long working lifetime: more than 50,000 hours  
使用寿命长达50,000小时
- 2) No UV or RF interference, no Mercury or Lead  
没有紫外线或电磁干扰, 不含汞或铅
- 3) Protection class: waterproof, IP68  
保护等级: IP68
- 4) Storage temperature: -20~50°C  
使用环境温度: -20~50°C
- 5) Smart appearance  
外观精美
- 6) The light is soft  
光线柔和

### Application: (应用范围)

- 1) Swimming pool lighting  
泳池照明
- 2) Aquarium lighting  
水族照明
- 3) Exterior wall lighting  
外墙照明

### QS-AL-27SMD



ITEM NUMBER 产品型号	LIGHT SOURCE 光源类型	COLOR 颜色	LUMINOUS FLUX 流明	BEAM ANGLE 发光角度	INPUT VOLTAGE 输入电压	WATTS 功率	DIMENSION 产品尺寸
QS-AL-27SMD-W	27 pcs SMD LED	Cool White	130lm	120°	12/24VDC	1.8W	(L)25x(W)2.4x(H)1.0cm
QS-AL-27SMD-WW	27 pcs SMD LED	Warm White	100lm	120°	12/24VDC	1.8W	(L)25x(W)2.4x(H)1.0cm
QS-AL-27SMD-R	27 pcs SMD LED	Red	/	120°	12/24VDC	1.8W	(L)25x(W)2.4x(H)1.0cm
QS-AL-27SMD-G	27 pcs SMD LED	Green	/	120°	12/24VDC	1.8W	(L)25x(W)2.4x(H)1.0cm
QS-AL-27SMD-B	27 pcs SMD LED	Blue	/	120°	12/24VDC	1.8W	(L)25x(W)2.4x(H)1.0cm
QS-AL-36SMD-RGB	36 pcs SMD LED	RGB	/	120°	12/24VDC	2.6W	(L)25x(W)2.4x(H)1.0cm
QS-AL-54SMD-W	54 pcs SMD LED	Cool White	260lm	120°	12/24VDC	3.6W	(L)50x(W)2.4x(H)1.0cm
QS-AL-54SMD-WW	54 pcs SMD LED	Warm White	200lm	120°	12/24VDC	3.6W	(L)50x(W)2.4x(H)1.0cm
QS-AL-54SMD-R	54 pcs SMD LED	Red	/	120°	12/24VDC	3.6W	(L)50x(W)2.4x(H)1.0cm
QS-AL-54SMD-G	54 pcs SMD LED	Green	/	120°	12/24VDC	3.6W	(L)50x(W)2.4x(H)1.0cm
QS-AL-54SMD-B	54 pcs SMD LED	Blue	/	120°	12/24VDC	3.6W	(L)50x(W)2.4x(H)1.0cm
QS-AL-72SMD-RGB	72 pcs SMD LED	RGB	/	120°	12/24VDC	5.2W	(L)50x(W)2.4x(H)1.0cm
QS-AL-108SMD-W	108 pcs SMD LED	Cool White	520lm	120°	12/24VDC	7.2W	(L)100x(W)2.4x(H)1.0cm
QS-AL-108SMD-WW	108 pcs SMD LED	Warm White	400lm	120°	12/24VDC	7.2W	(L)100x(W)2.4x(H)1.0cm
QS-AL-108SMD-R	108 pcs SMD LED	Red	/	120°	12/24VDC	7.2W	(L)100x(W)2.4x(H)1.0cm
QS-AL-108SMD-G	108 pcs SMD LED	Green	/	120°	12/24VDC	7.2W	(L)100x(W)2.4x(H)1.0cm
QS-AL-108SMD-B	108 pcs SMD LED	Blue	/	120°	12/24VDC	7.2W	(L)100x(W)2.4x(H)1.0cm
QS-AL-144SMD-RGB	144 pcs SMD LED	RGB	/	120°	12/24VDC	10.4W	(L)100x(W)2.4x(H)1.0cm

## Flexible SMD LED Strip





### Features: (特性)

- 1) Long working lifetime: more than 50,000 hours  
使用寿命长达50,000小时
- 2) 5 meters/reel, cuttable every 5cm(three LEDs).  
5米/卷, 每三颗LED可以截断
- 3) Waterproof type is available  
可做防水处理
- 4) Easy installation with adhesive tape  
背面胶带固定, 安装方便

### Application: (应用范围)

- 1) Edge lighting  
侧光
- 2) Backlighting for Channel letters  
背光
- 4) Replacement for T5 tube light for shelf lighting  
替代T5灯管
- 5) Decorative lighting for hotel and bar  
酒店和酒吧装饰照明

QS-FL

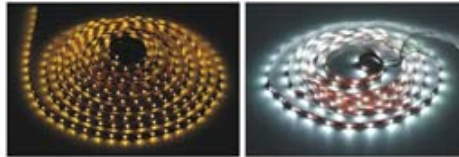

ITEM NUMBER 产品型号	LIGHT SOURCE 光源类型	COLOR 颜色	LUMINOUS FLUX 流明	BEAM ANGLE 发光角度	INPUT VOLTAGE 输入电压	WATTS 功率	DIMENSION 产品尺寸
QS-FL-300SMD-W	300 pcs 1210 SMD LED	Cool White	1500lm	120°	12VDC	24W	(L)5000x(W)8x(H)2.2mm
QS-FL-300SMDWW	300 pcs 1210 SMD LED	Warm White	1200lm	120°	12VDC	24W	(L)5000x(W)8x(H)2.2mm
QS-FL-300SMD-R	300 pcs 1210 SMD LED	Red	/	120°	12VDC	24W	(L)5000x(W)8x(H)2.2mm
QS-FL-300SMD-G	300 pcs 1210 SMD LED	Green	/	120°	12VDC	24W	(L)5000x(W)8x(H)2.2mm
QS-FL-300SMD-B	300 pcs 1210 SMD LED	Blue	/	120°	12VDC	24W	(L)5000x(W)8x(H)2.2mm
QS-FL-150SMDRGB	150 pcs 5050 SMD LED	RGB	/	120°	12VDC	36W	(L)5000x(W)10x(H)2.2mm

## Rigid SMD LED Strip


### Application: (应用范围)

- 1) Backlighting for channel letters
- 2) Mood lighting
- 3) Edge lighting
- 4) Emergency hallway lighting

### Features: (特性)

- 1) Long working lifetime: more than 50,000 hours  
使用寿命长达50,000小时
- 2) Neat structure and low power consumption  
灯体小巧, 功耗低
- 3) Easy installation  
安装方便
- 4) No UV or RF interference, no Mercury or Lead  
没有紫外线或电磁干扰, 不含汞或铅

QS-RL

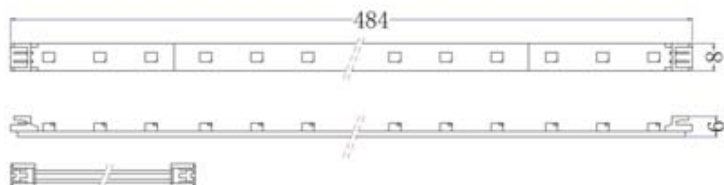

ITEM NUMBER 产品型号	LIGHT SOURCE 光源类型	COLOR 颜色	LUMINOUS FLUX 流明	BEAM ANGLE 发光角度	INPUT VOLTAGE 输入电压	WATTS 功率	DIMENSION 产品尺寸
QS-RL-30SMD-W	30pcs SMD LED	Cool White	150lm	120°	12VDC	2.2W	(L)484x(W)8x(H)6mm
QS-RL-30SMD-WW	30pcs SMD LED	Warm White	120lm	120°	12VDC	2.2W	(L)484x(W)8x(H)6mm
QS-RL-30SMD-R	30pcs SMD LED	Red	/	120°	12VDC	2.2W	(L)484x(W)8x(H)6mm
QS-RL-30SMD-G	30pcs SMD LED	Green	/	120°	12VDC	2.2W	(L)484x(W)8x(H)6mm
QS-RL-30SMD-B	30pcs SMD LED	Blue	/	120°	12VDC	2.2W	(L)484x(W)8x(H)6mm
QS-RL-30SMD-RGB	30pcs SMD LED	RGB	/	120°	12VDC	5.6W	(L)570x(W)8x(H)6mm

# LED Wall Washers




## Features: (特性)

- 1) Long working lifetime: more than 50,000 hours  
使用寿命超过50,000小时
- 2) Beam distance: more than 15 meters  
灯光照射距离达15米以上
- 3) Protection class: IP67  
防护等级: IP67
- 4) DMX 512 compatible  
兼容DMX512
- 5) Storage temperature: -20~50°C  
使用环境温度: -20~50°C
- 6) No UV or RF interference, no Mercury or Lead  
没有紫外线或电磁干扰, 不含汞或铅

## Applications: (应用范围)

Floodlighting and wall washing for bars, clubs, hotels, stages, parks, plazas, commercial buildings facade, mosques, museums, and art galleries, historical buildings, etc

广泛应用于酒吧, 酒店, 舞台, 公园, 广场, 商业建筑, 博物馆等娱乐和商业场所的泛光装饰照明

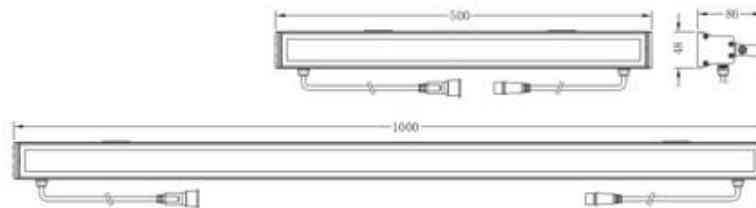

ITEM NUMBER	LIGHT SOURCE	COLOR	LUMINOUS FLUX	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	流明	发光角度	输入电压	功率	产品尺寸
QS-WL-15-W	Edison LED	Cool White	1050lm	15°/30°	24VDC	15W	(L)500x(W)48x(H)86mm
QS-WL-15-WW	Edison LED	Warm White	900lm	15°/30°	24VDC	15W	(L)500x(W)48x(H)86mm
QS-WL-15-R	Edison LED	Red	/	15°/30°	24VDC	15W	(L)500x(W)48x(H)86mm
QS-WL-15-G	Edison LED	Green	/	15°/30°	24VDC	15W	(L)500x(W)48x(H)86mm
QS-WL-15-B	Edison LED	Blue	/	15°/30°	24VDC	15W	(L)500x(W)48x(H)86mm
QS-WL-15-Y	Edison LED	Yellow	/	15°/30°	24VDC	15W	(L)500x(W)48x(H)86mm
QS-WL-15-RGB	Edison LED	RGB	/	15°/30°	24VDC	15W	(L)500x(W)48x(H)86mm
QS-WL-30-W	Edison LED	Cool White	2100lm	15°/30°	24VDC	30W	(L)1000x(W)48x(H)86mm
QS-WL-30-WW	Edison LED	Warm White	1800lm	15°/30°	24VDC	30W	(L)1000x(W)48x(H)86mm
QS-WL-30-R	Edison LED	Red	/	15°/30°	24VDC	30W	(L)1000x(W)48x(H)86mm
QS-WL-30-G	Edison LED	Green	/	15°/30°	24VDC	30W	(L)1000x(W)48x(H)86mm
QS-WL-30-B	Edison LED	Blue	/	15°/30°	24VDC	30W	(L)1000x(W)48x(H)86mm
QS-WL-30-Y	Edison LED	Yellow	/	15°/30°	24VDC	30W	(L)1000x(W)48x(H)86mm
QS-WL-30-RGB	Edison LED	RGB	/	15°/30°	24VDC	30W	(L)1000x(W)48x(H)86mm



## LED Wall Washers

### Features: (特性)

- 1) Long working lifetime: more than 50,000 hours  
使用寿命超过50,000小时
- 2) Instant soft start  
瞬间软启动
- 3) Beam distance: more than 20 meters  
灯光照射距离达20米以上
- 4) Protection class: IP65  
防护等级: IP65
- 5) DMX 512 compatible  
兼容DMX512
- 6) Storage temperature: -20~50°C  
使用环境温度: -20~50°C
- 7) No UV or RF interference, no Mercury or Lead  
没有紫外线或电磁干扰, 不含汞或铅

### Applications: (应用范围)

Floodlighting and wall washing for bars, clubs, hotels, stages, parks, plazas, commercial buildings facade, mosques, museums, and art galleries, historical buildings, etc  
广泛应用于酒吧, 酒店, 舞台, 公园, 广场, 商业建筑, 博物馆等娱乐和商业场所的泛光装饰照明


QS-WL-72



ITEM NUMBER	LIGHT SOURCE	COLOR	BEAM ANGLE	INPUT VOLTAGE	WATTS	DIMENSION
产品型号	光源类型	颜色	发光角度	输入电压	功率	产品尺寸
QS-WL-72RGB	Edison LED	R:24/G:24/B:24	15°/30°	100V-265VAC	72W	(L)640x(W)162x(H)150mm


## LED Modules for Channel Letters and Signs

### QS-M4

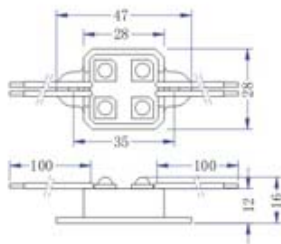


ITEM NUMBER	LIGHT SOURCE	COLOR	BEAM ANGLE	INPUT VOLTAGE	WATTS
产品型号	光源类型	颜色	发光角度	输入电压	功率
QS-M4-W	4pcs Super Flux LED	Cool White	120°	12VDC	0.48W
QS-M4-WW	4pcs Super Flux LED	Warm White	120°	12VDC	0.48W
QS-M4-R	4pcs Super Flux LED	Red	120°	12VDC	0.48W
QS-M4-G	4pcs Super Flux LED	Green	120°	12VDC	0.48W
QS-M4-B	4pcs Super Flux LED	Blue	120°	12VDC	0.48W
QS-M4-Y	4pcs Super Flux LED	Yellow	120°	12VDC	0.48W

### QS-AM4

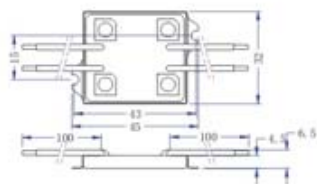

ITEM NUMBER	LIGHT SOURCE	COLOR	BEAM ANGLE	INPUT VOLTAGE	WATTS
产品型号	光源类型	颜色	发光角度	输入电压	功率
QS-AM4-W	4pcs SMD LED	Cool White	120°	12VDC	0.4W
QS-AM4-WW	4pcs SMD LED	Warm White	120°	12VDC	0.4W
QS-AM4-R	4pcs SMD LED	Red	120°	12VDC	0.4W
QS-AM4-G	4pcs SMD LED	Green	120°	12VDC	0.4W
QS-AM4-B	4pcs SMD LED	Blue	120°	12VDC	0.4W
QS-AM4-Y	4pcs SMD LED	Yellow	120°	12VDC	0.4W

### QS-M3

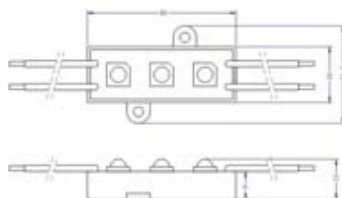

ITEM NUMBER	LIGHT SOURCE	COLOR	BEAM ANGLE	INPUT VOLTAGE	WATTS
产品型号	光源类型	颜色	发光角度	输入电压	功率
QS-M3-W	3pcs Super Flux LED	Cool White	120°	12VDC	0.24W
QS-M3-WW	3pcs Super Flux LED	Warm White	120°	12VDC	0.24W
QS-M3-R	3pcs Super Flux LED	RED	120°	12VDC	0.24W
QS-M3-G	3pcs Super Flux LED	GREEN	120°	12VDC	0.24W
QS-M3-B	3pcs Super Flux LED	BLUE	120°	12VDC	0.24W
QS-M3-Y	3pcs Super Flux LED	YELLOW	120°	12VDC	0.24W

## Accessories

### Waterproof Power Supply



ITEM NUMBER 产品型号	INPUT VOLTAGE 输入电压	OUTPUT VOLTAGE 输出电压	OUTPUT CURRENT 输出电流	OUTPUT MAX POWER 输出最大功率
12V-18W	120V/240V	12V	1.5A	18W
12V-30W	120V/240V	12V	2.5A	30W
12V-60W	120V/240V	12V	5A	60W
12V-100W	120V/240V	12V	8.5A	100W
12V-150W	120V/240V	12V	12.5A	150W
24V-18W	120V/240V	24V	0.75A	18W
24V-30W	120V/240V	24V	1.2A	30W
24V-60W	120V/240V	24V	2.5A	60W
24V-100W	120V/240V	24V	4.2A	100W
24V-150W	120V/240V	24V	6A	150W

### Power Supply(Special for LED Downlights and Puck Lights)



ITEM NUMBER 产品型号	INPUT VOLTAGE 输入电压	OUTPUT VOLTAGE 输出电压	OUTPUT CURRENT 输出电流	OUTPUT MAX POWER 输出最大功率	REMARK 备注
12V-12W-3B	100-240V	12V	100-240V	12W	With terminal box for three lights 配3灯端子盒
12V-18W-3B	100-240V	12V	100-240V	18W	
12V-36W-3B	100-240V	12V	100-240V	36W	
12V-12W-6B	100-240V	12V	100-240V	12W	With terminal box for six lights 配6灯端子盒
12V-18W-6B	100-240V	12V	100-240V	18W	
12V-36W-6B	100-240V	12V	100-240V	36W	

### Constant Current LED Driver



ITEM NUMBER 产品型号	INPUT VOLTAGE 输入电压	OUTPUT CURRENT 输出电流	OUTPUT WATTAGE 输出功率	REMARK 备注
CLD-A3503	100-250V	350mA	3W	Suitable for 1-3pcs 1W LEDs
CLD-A3536	100-250V	350mA	8W	Suitable for 1-8pcs 1W LEDs
CLD-B3503	100-250V	350mA	3W	Suitable for 1-3pcs 1W LEDs(with plug)
CLD-B3536	100-250V	350mA	8W	Suitable for 1-8pcs 1W LEDs(with plug)
CLD-A3554	100-250V	350mA	16W	Suitable for 4-16pcs 1W LEDs
CLD-A7006	100-250V	700mA	6W	Suitable for 1-2pcs 3W LEDs
CLD-A7021	100-250V	700mA	12W	Suitable for 1-4pcs 3W LEDs
CLD-B7006	100-250V	700mA	6W	Suitable for 1-2pcs 3W LEDs(with plug)
CLD-B7021	100-250V	700mA	12W	Suitable for 1-4pcs 3W LEDs(with plug)
CLD-A7034	100-250V	700mA	18W	Suitable for 1-6pcs 3W LEDs

# Intelligent Control System

QS-IT-C



## Features:

- 1) Infrared remote control
- 2) Dimmer and timing
- 3) Two kinds of dimming. One is dimming by pressing buttons to choose preset level. There are four levels. Another way is stepless dimming by pressing "△" and "▽"
- 4) Set IP address by choosing any two characters among 1-9, A, B, C, D, E, F. For example, 11, 18, 9A, B2, CD, FF, and so on. Totally 225 IP addresses are available.
- 5) Each IP address can work with unlimited lighting fixtures. All the lighting fixtures at the same IP address change synchronously. By setting IP address, we can realize dimming and timing on the lighting fixtures individually or synchronously.
- 6) With built-in highly efficient constant current LED drivers in the lighting fixtures, the efficiency of conversion from electricity to light reaches 93%.
- 7) Self-protection. If the Voltage exceeds the preset scale, the lighting fixtures will turn off automatically.

## Application:

It can be widely used in hotel, restaurant, living room, office and commercial places.

