





1W flat LED modules

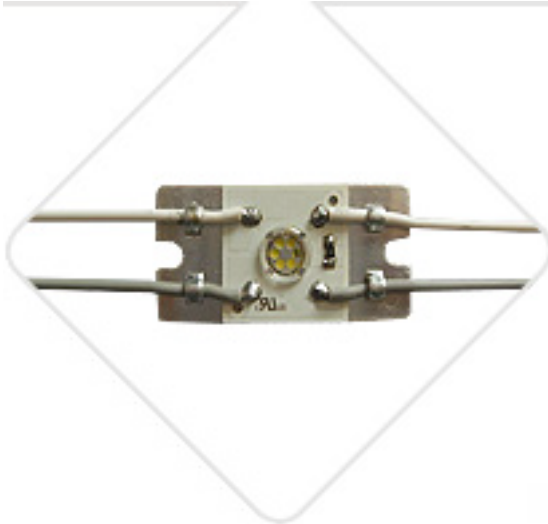


Features:

- High luminous flux output
- Shock and vibration resistant
- Low power consumption
- Environment friendly, RoHS compliant
- Long life (50,000 hours) with 70% lumen maintenance
- Better heat sink structure

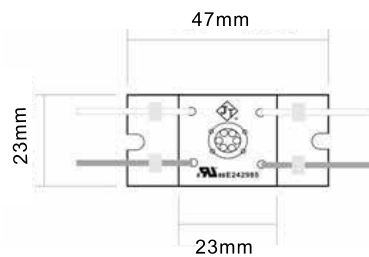


Wavelength chart


JT-SLS001R-SU1.0FLAT: ■

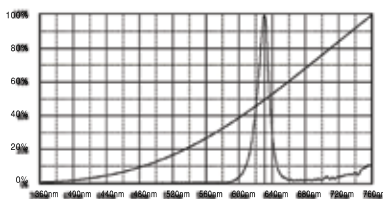


JT-SLS002A-SU1.0FLAT: ■

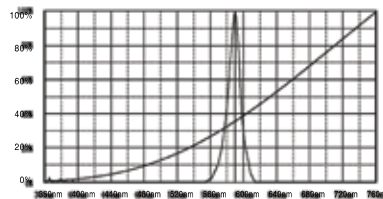


JT-SLS003B-SU1.0FLAT: ■

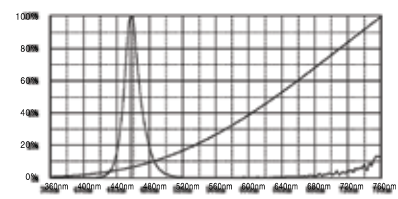


JT-SLS004G-SU1.0FLAT: ■

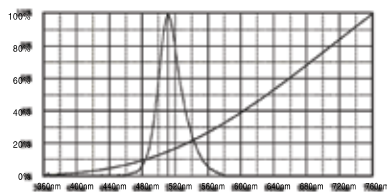


JT-SLS005W-SU1.0FLAT: □

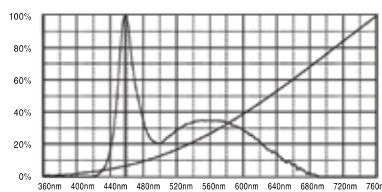

Typical electrical/optical characteristic curve

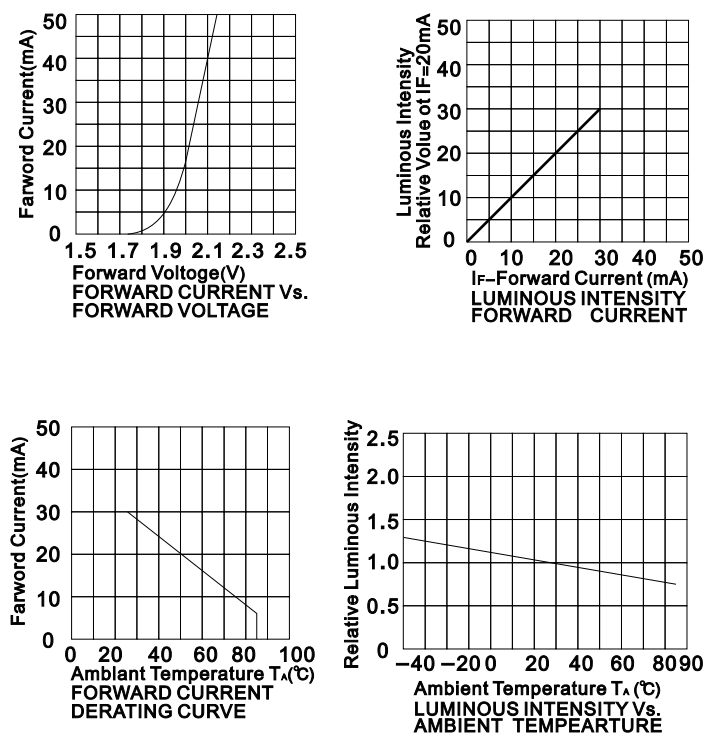


CIE chromaticity diagram

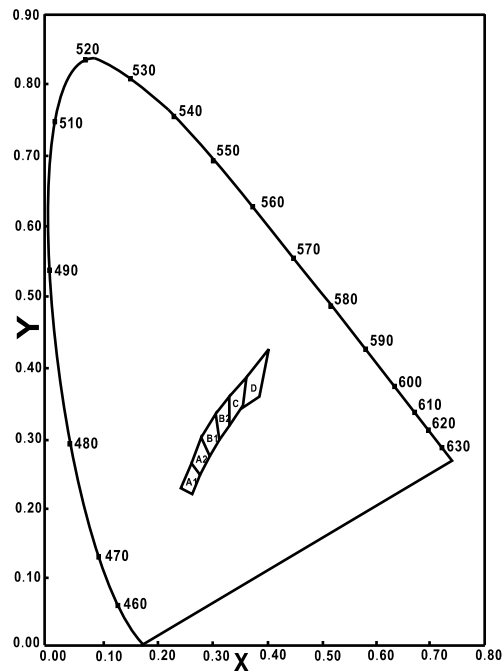

Packing LED modules

Packing List: Carton Size: 590mm*320mm*310mm , Twenty boxes included in one carton (Quantity: 1000 pcs/carton),
 Each box contains 50 pcs, size 290mm*150mm*30mm,
 Product name and bar code are on both the box and the side of the carton, Gross Weight: 7. 8KG

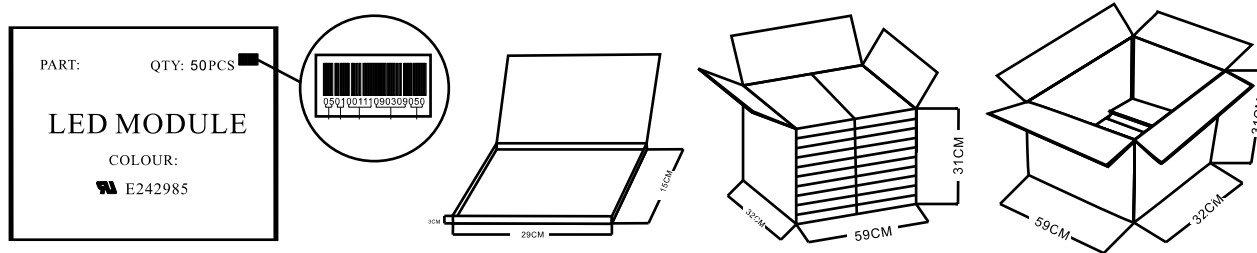

LED modules specification

	Color	Operating Voltage	Rated Current	Rated Power	Size	Viewing Angle	Luminous Intensity
JT-SLS001R-SU1.0FLAT		12V DC	80mA	1.0W	47*23*3mm	120°	25-30 lm
JT-SLS002A-SU1.0FLAT		12V DC	80mA	1.0W	47*23*3mm	120°	15-20 lm
JT-SLS003B-SU1.0FLAT		12V DC	80mA	1.0W	47*23*3mm	120°	20-25 lm
JT-SLS004G-SU1.0FLAT		12V DC	80mA	1.0W	47*23*3mm	120°	20-25 lm
JT-SLS005W-SU1.0FLAT		12V DC	80mA	1.0W	47*23*3mm	120°	35-40 lm